
This is a reproduction of a library book that was digitized by Google as part of an ongoing effort to preserve the information in books and make it universally accessible.


GoogleTM books

<https://books.google.com>



TL
678
N6
v. 2
Addend.

SAL

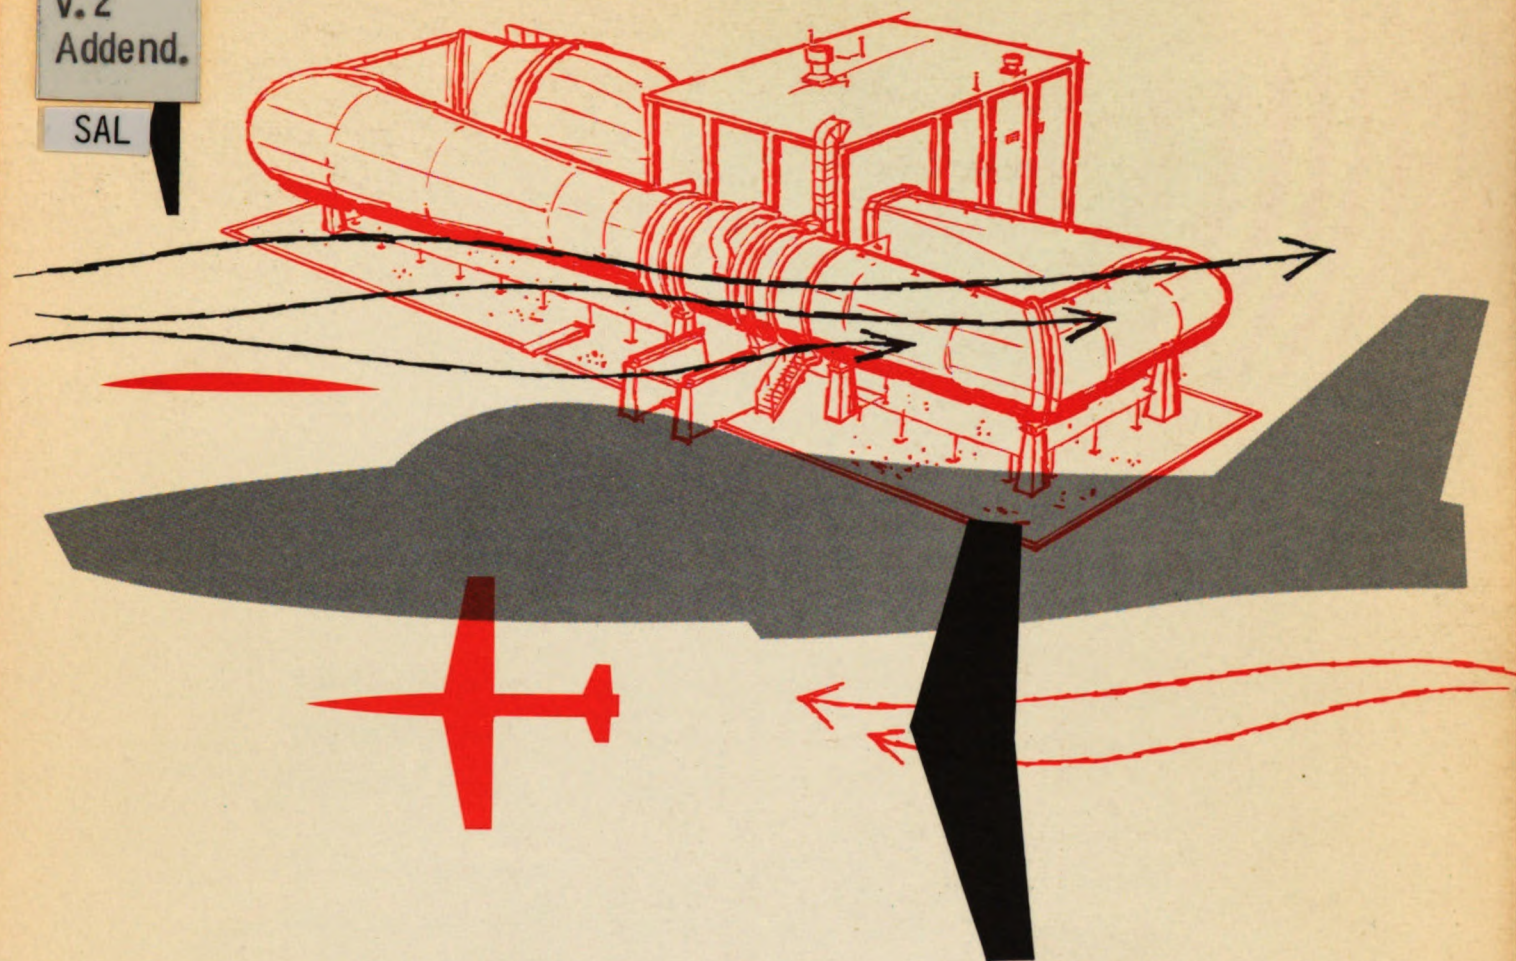

DYNAMICS OF THE AIRFRAME ADDENDUM

AE-6-4-II

NORAIR A DIVISION OF NORTHROP CORPORATION



**STANFORD
UNIVERSITY
LIBRARIES**

**BUREAU OF AERONAUTICS
FLIGHT CONTROL SYSTEM MANUALS**

This series was originally prepared by Norair under Bureau of Aeronautics sponsorship to correlate the new and expanding techniques of automatic, powered control systems.

Continuing interest in these manuals, expressed by educational and industrial agencies, affirms the need for authoritative documents presenting technology of this scientific area.

In response Norair is offering, with Bureau of Aeronautics permission and encouragement, special reprints of the entire series of manuals to all interested individuals and agencies. Our objective is to contribute to understanding and advancing the state-of-the-art.

A list of the other volumes in this series, including printing costs, may be found on the last page of this manual.



BU AER
Report AE - 61 - 4 II

DYNAMICS OF THE AIRFRAME

ADDENDUM

BASIC VOLUME
WRITTEN AND EDITED BY SERVOMECHANISMS
SECTION AND AERODYNAMICS SECTION
NORTHROP AIRCRAFT, INC.

CONTRIBUTIONS TO VOLUME
BY OTHER AUTHORS
ARE NOTED IN INDIVIDUAL SECTIONS
IN ACCORDANCE WITH "IMPORTANT NOTE"
ON FOLLOWING PAGE



PREPARATION OF VOLUME
SPONSORED BY
BUREAU OF AERONAUTICS, NAVY DEPARTMENT

SEPTEMBER, 1952

Ro 2

C07215

TL 678

N6

V. 2.

Addendum.

The material of this addendum forms part of Report AE-61-4II, which together with Report AE-61-4I, has been written under BuAer Contract NOas 51-514(c), "Fundamentals of Design of Piloted Aircraft Flight Control Systems." These form part of a series of manuals being written for the purpose of providing a unified approach to problems of control system design.

For the sake of securing as wide a distribution as possible, Report AE-61-4I, "Methods of Analysis and Synthesis," which is Volume I of this series, and the part, "Dynamics of the Airframe" (Vol. II), of AE-61-4II which precedes this confidential addendum, have been issued in an unclassified status, in accordance with one of the general intents of the series to provide a source of information to be used by engineers in bridging the gap between their collegiate training and the more advanced topics of system engineering.

Since the figures of this addendum contain classified data, they could not be included in the body of this Report, but are presented here in order to include the maximum usable information available at this time. Because of the disparity in level of classification, no mention of this addendum has been made in the body of this Report, but the information herein is to be considered in conjunction with the contents of Chapter IV.

The numerical values and the ranges of values of derivatives shown on the following charts are estimates, based on trends shown by flight tests, wind tunnel tests, and theory; they apply only to fighter type piloted aircraft of today and the near future. They do not apply to missile configurations where the wing is quite small compared to the body, for in these configurations the range of values of non-dimensional derivatives can become very large. (Pitkin, Marvin, and Ankenbruck, Herman O., "Estimation of Range of Stability Derivatives for Current and Future Pilotless Aircraft," NACA Research Memorandum, RM L7E29, Langley Memorial Aeronautical Laboratory, Langley Field, Va., October 8, 1947.)

The following notation has been used in the graphs of this portion of this Report:

A solid line (————) has been used for straight wing aircraft; a broken line (— — — —), for swept wing; and a dotted line (-----) for delta wing.

It is to be noted that an abrupt and very large increase in C_D occurs in the transonic region, and that the delta wing configuration reduces this effect. The estimated range of values of C_D for present and near-future jet fighter type aircraft is from 0.01 to 0.50.

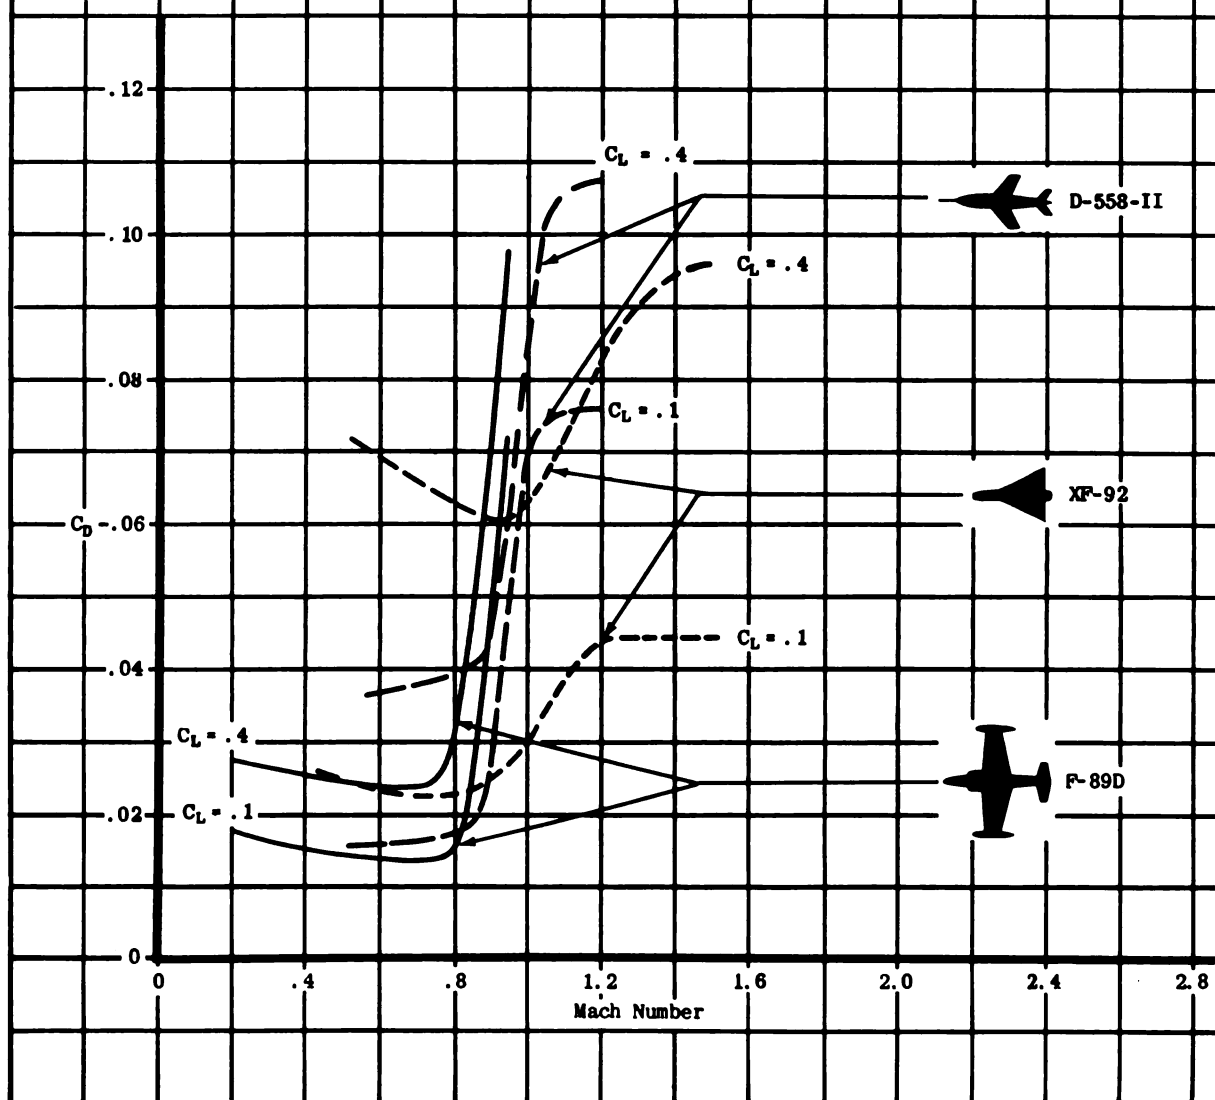


Figure A - 1 Variation of C_D with Mach Number for Several High Speed Jet Aircraft

It may be seen that C_{D_u} is approximately zero up to the critical Mach number region at which point it rises abruptly to large positive values, but that the abruptness of the rise and the magnitude which C_{D_u} attains are much less for the delta wing configuration. The estimated range of values of C_{D_u} for present and near-future jet fighter type aircraft is from -0.01 to 0.50.

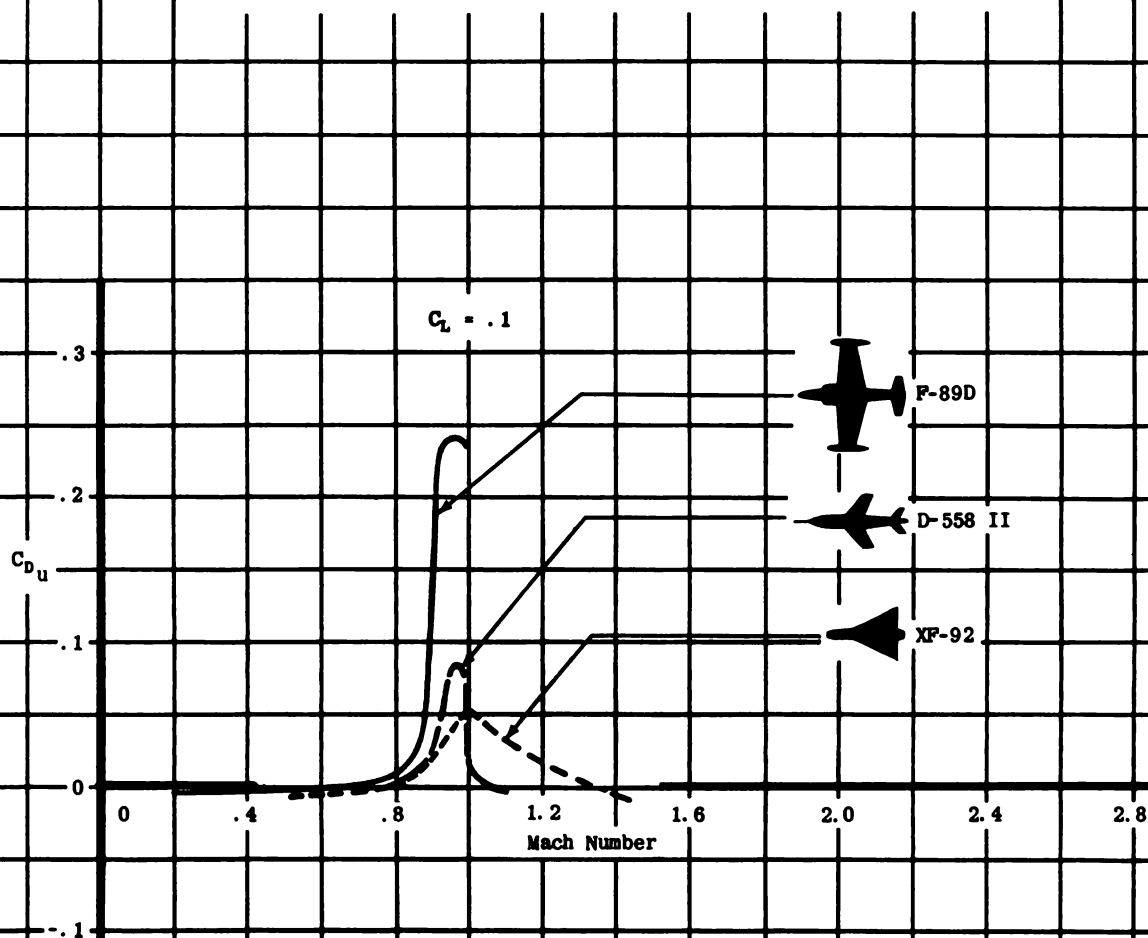


Figure A - 2 Variation of C_{D_u} with Mach Number for Several High Speed Jet Aircraft

The values for all three airframe configurations show large variations with Mach number in the transonic region. The level of values in the low subsonic region is primarily a function of the equilibrium lift coefficient. The estimated range of values of C_{D_α} for present and near-future jet fighter type aircraft is from 0.02 to 0.20.

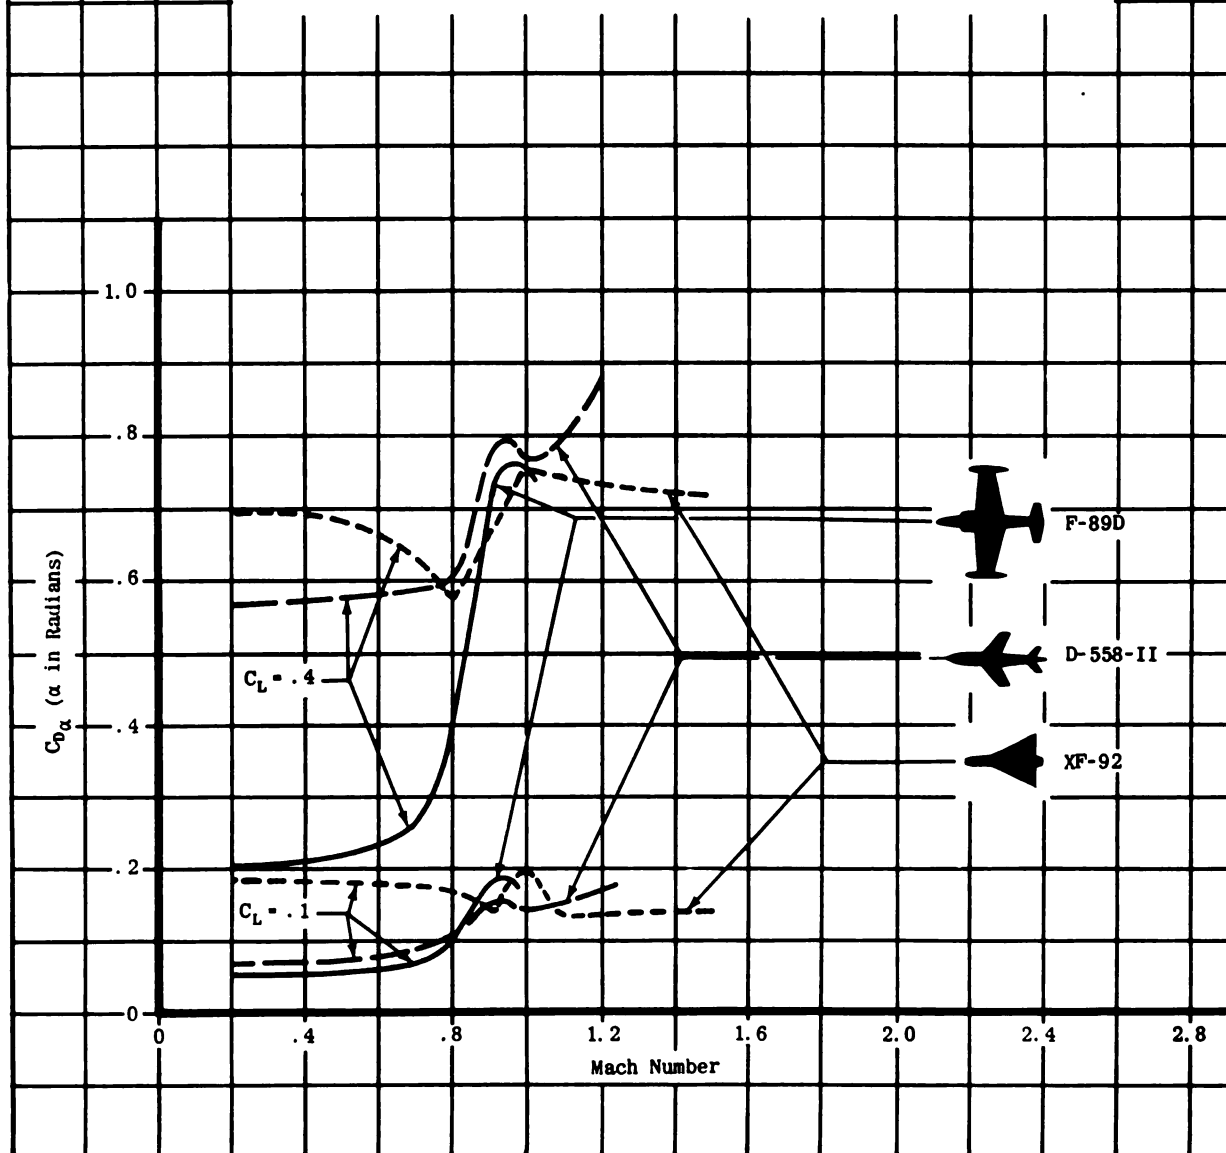


Figure A - 3 Variation of C_{D_α} with Mach Number for Several High Speed Jet Aircraft

The two curves shown for each type of aircraft indicate the probable ranges of equilibrium C_L . The estimated range of values of equilibrium lift coefficient for present and near-future jet fighter type aircraft is from .01 to 2.0.

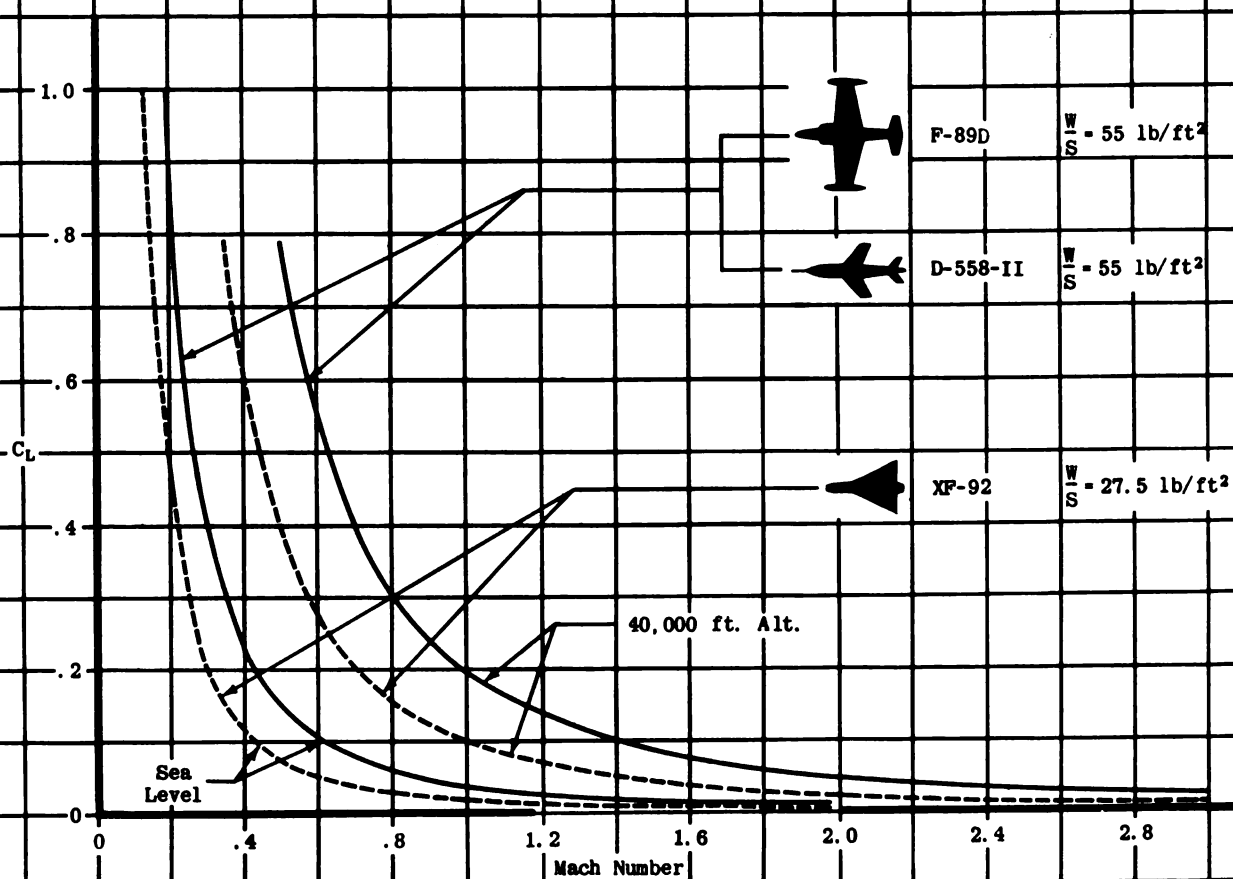


Figure A - 4 Variation of Equilibrium Lift Coefficient for Level Flight with Mach Number for Several High Speed Jet Aircraft

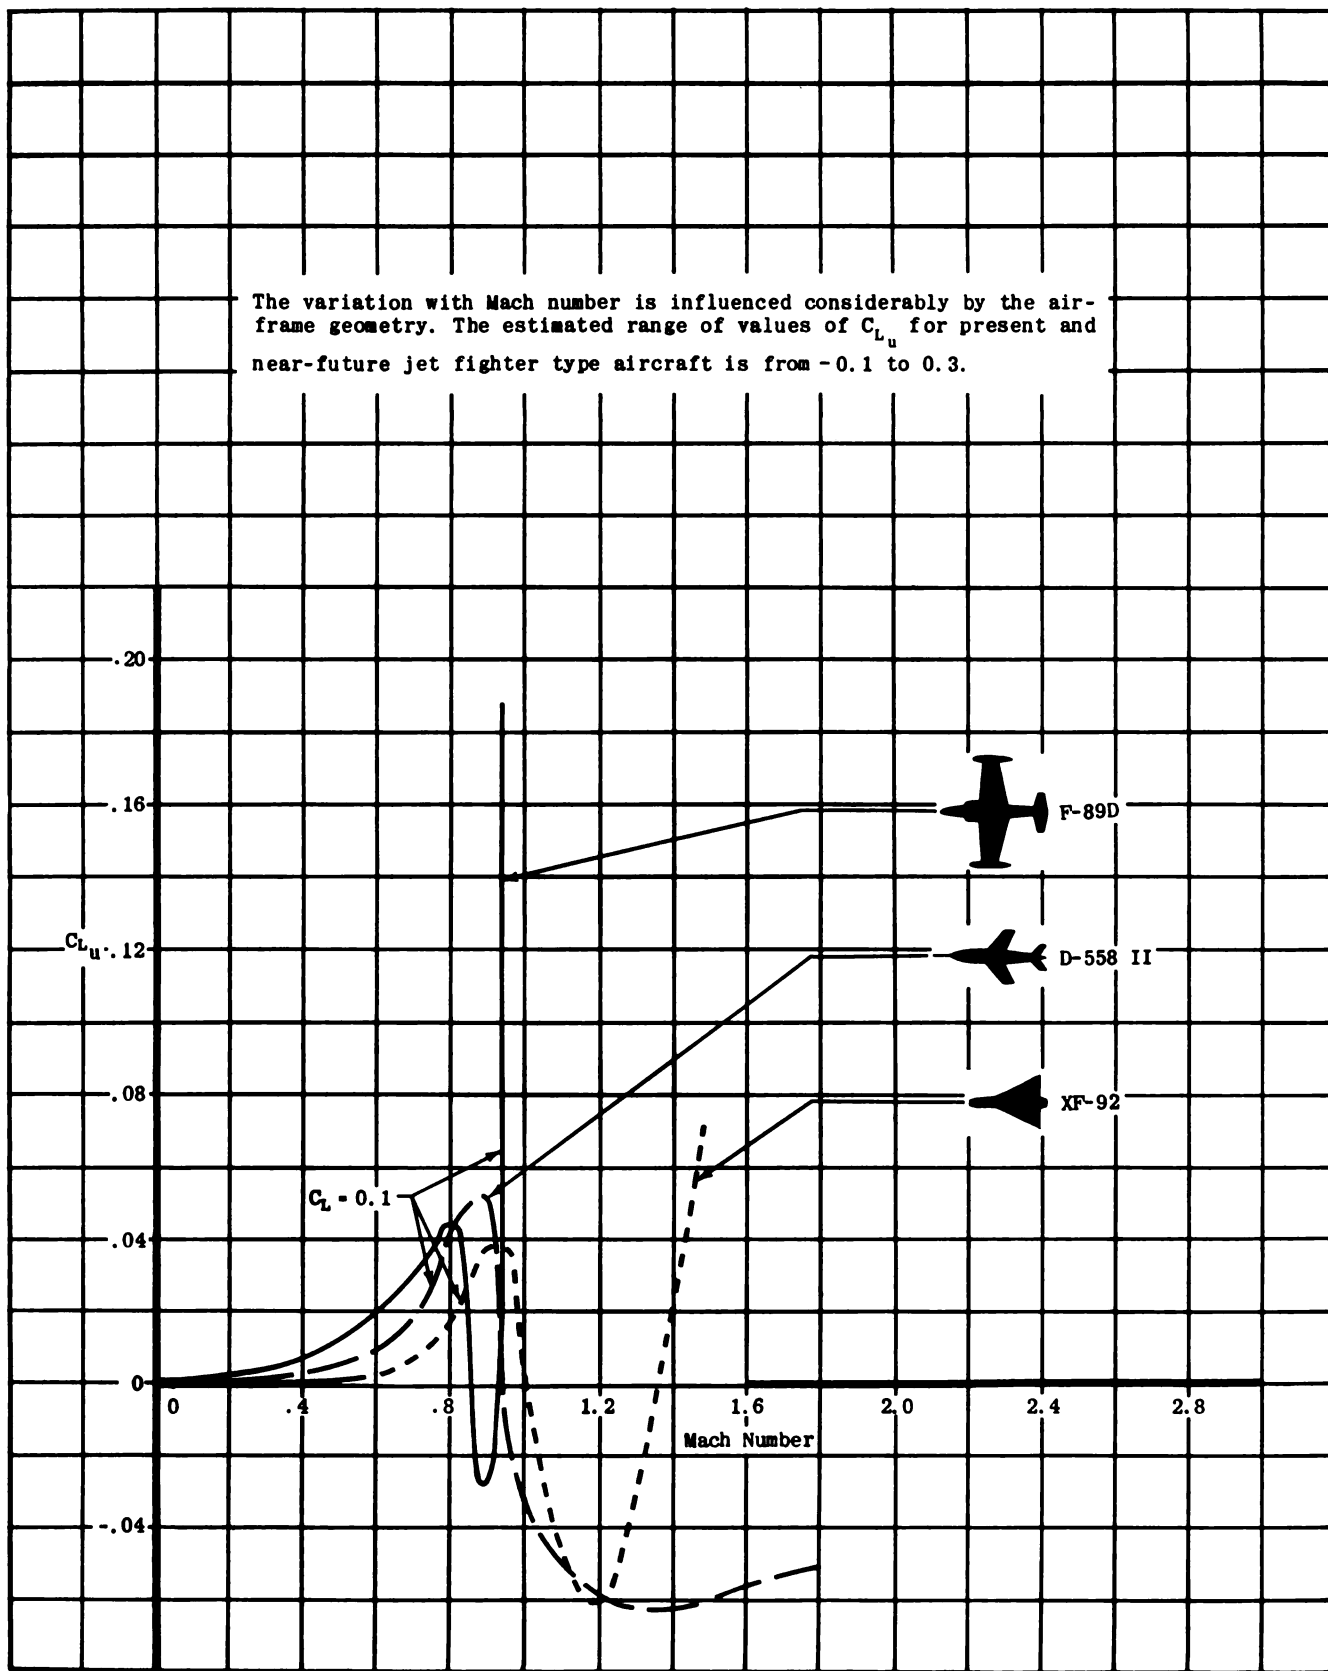


Figure A-5 Variation of C_{L_u} with Mach Number for Several High Speed Jet Aircraft

All the aircraft shown exhibit the same general trends with increasing Mach number. The estimated range of values of C_{L_α} for present and near-future jet fighter type aircraft is from 1.0 to 7.0.

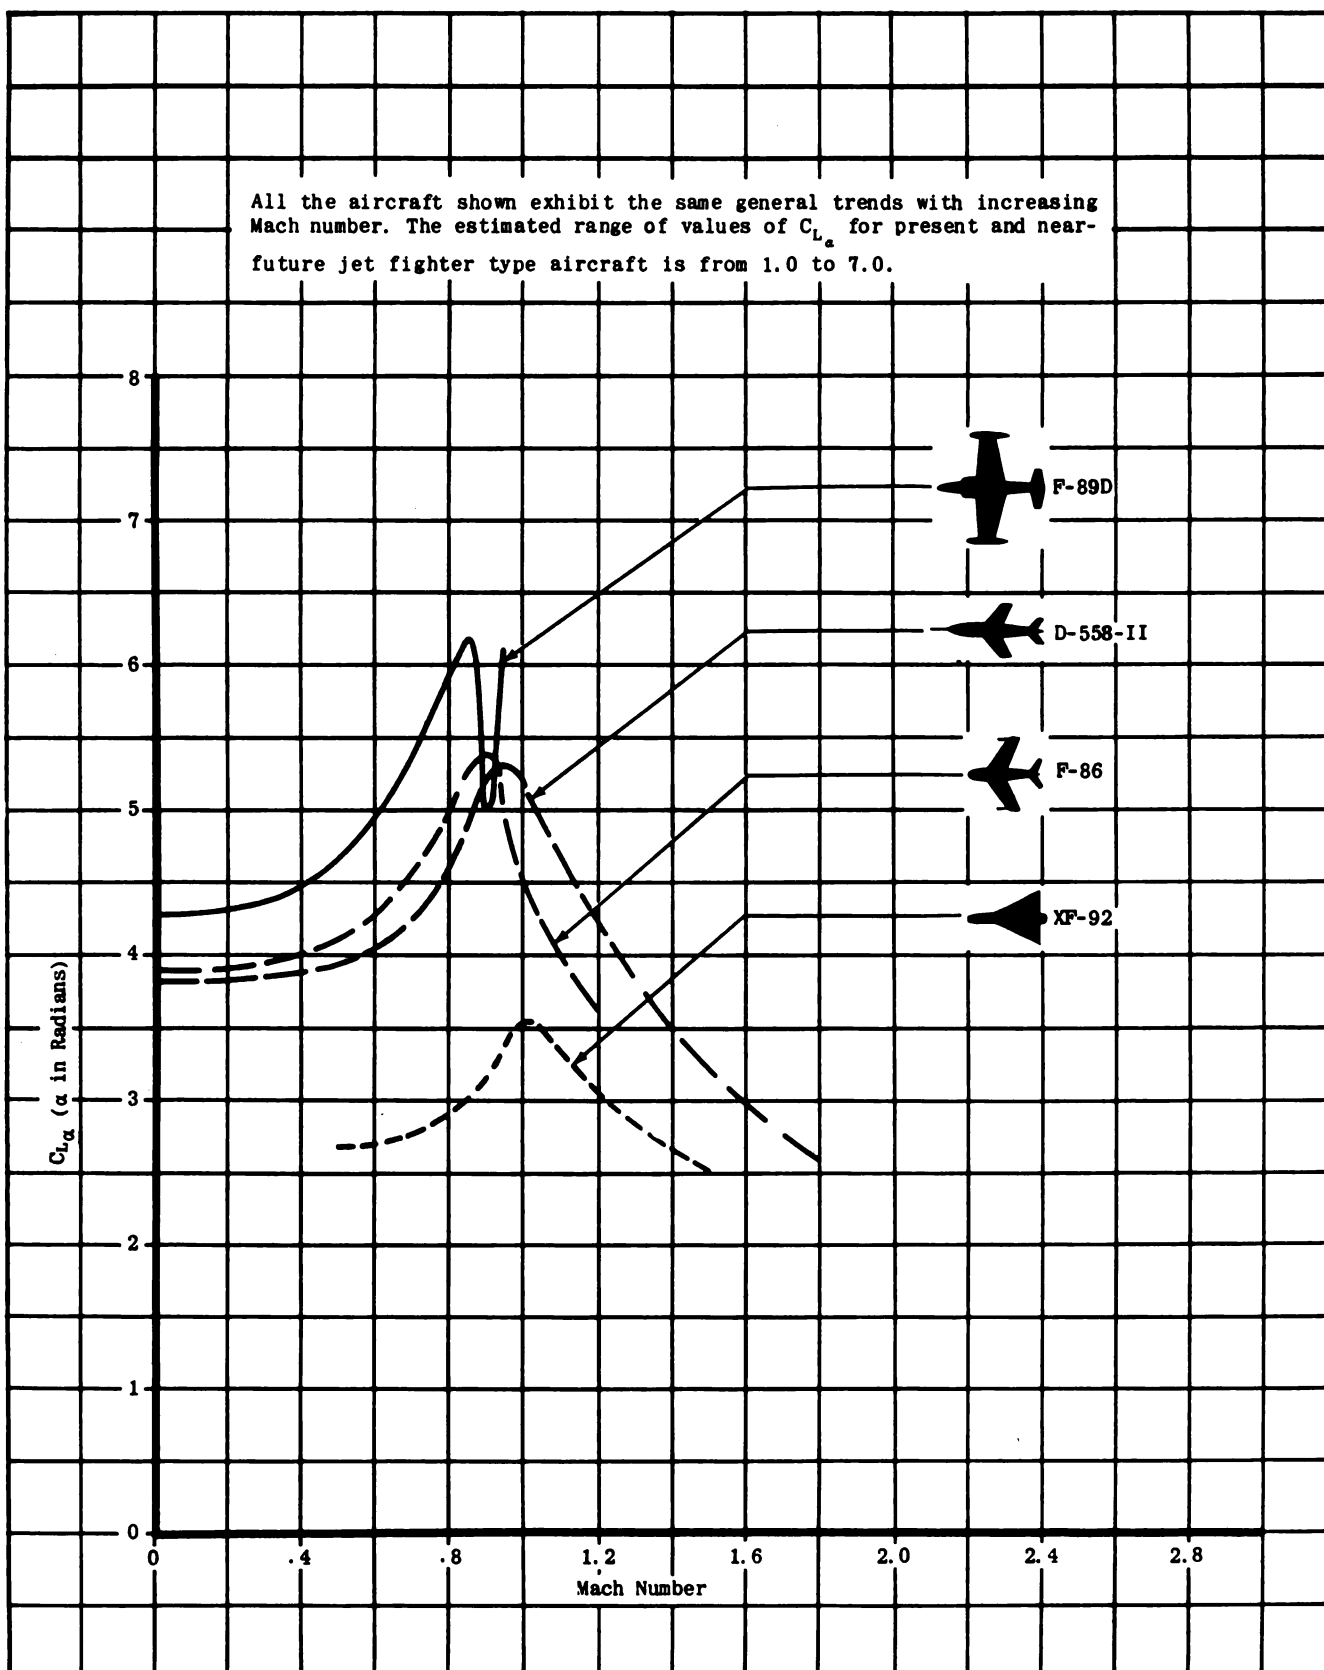


Figure A - 6 Variation of C_{L_α} with Mach Number for High Speed Jet Aircraft

The values for the XF-92 in the transonic region are large. The estimated values of C_{L_α} for present and near-future jet fighter type aircraft is from -5.0 to +5.0.

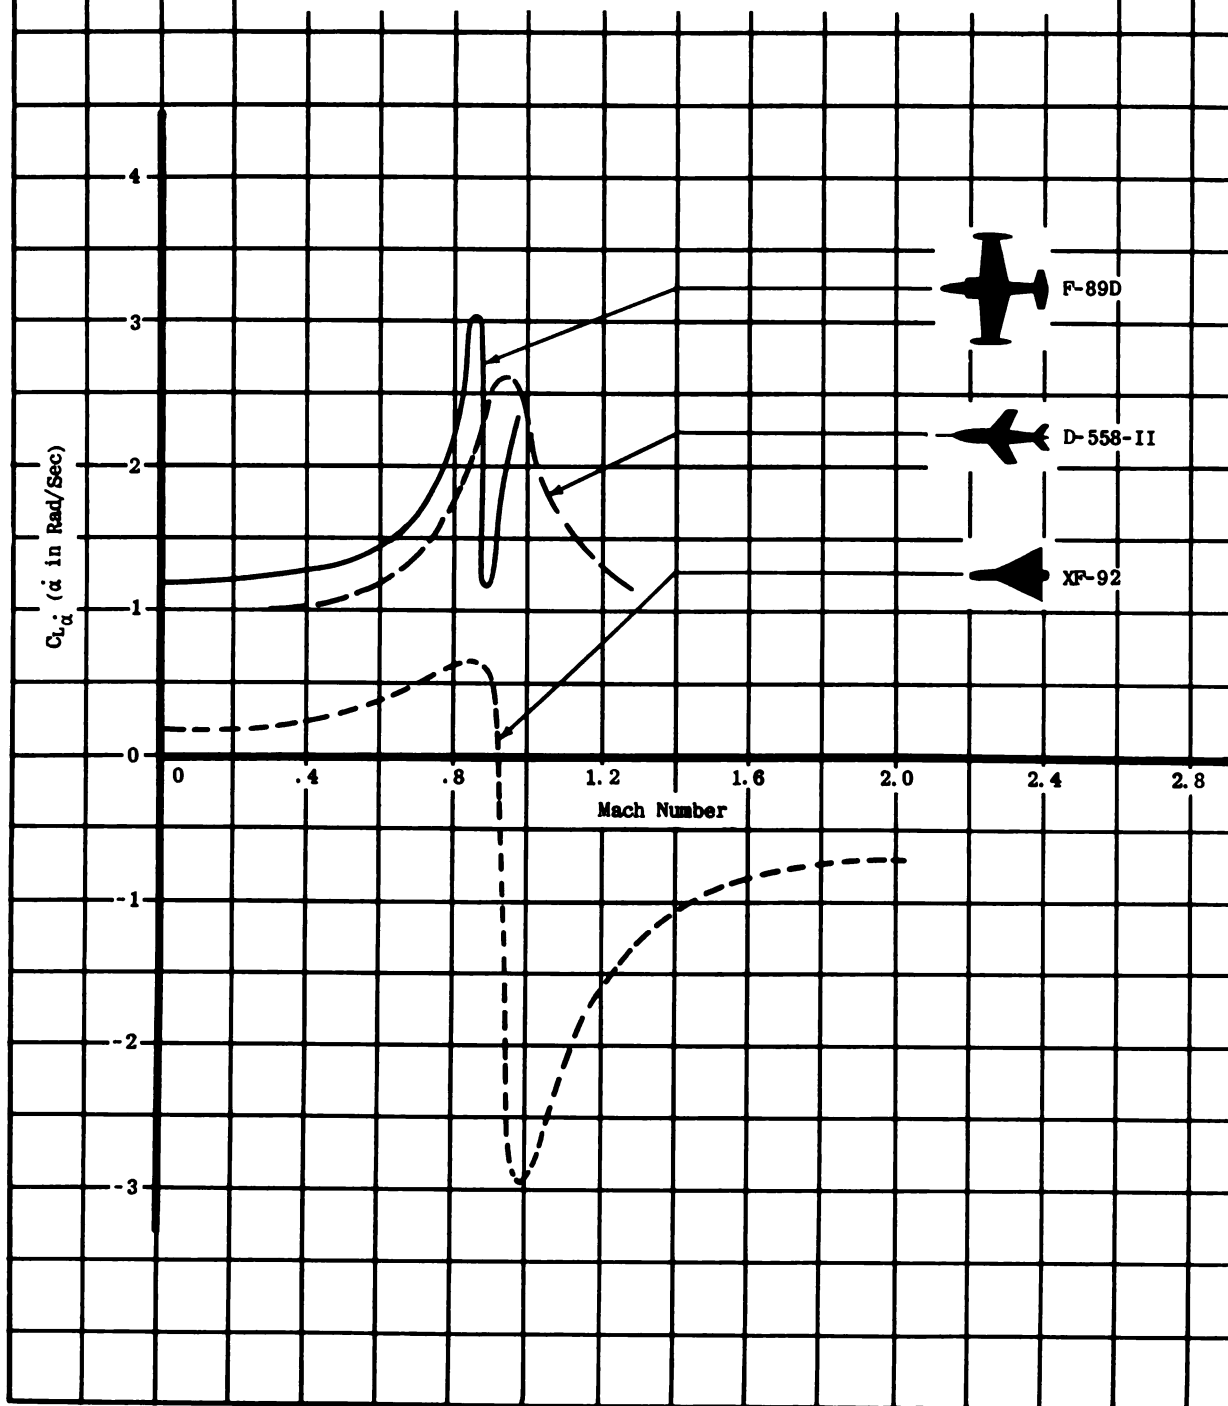


Figure A-7 Variation of C_{L_α} with Mach Number for Several High Speed Jet Aircraft

The estimated range of values of C_{Lq} for present and near-future jet fighter type aircraft is from 0 to 8.

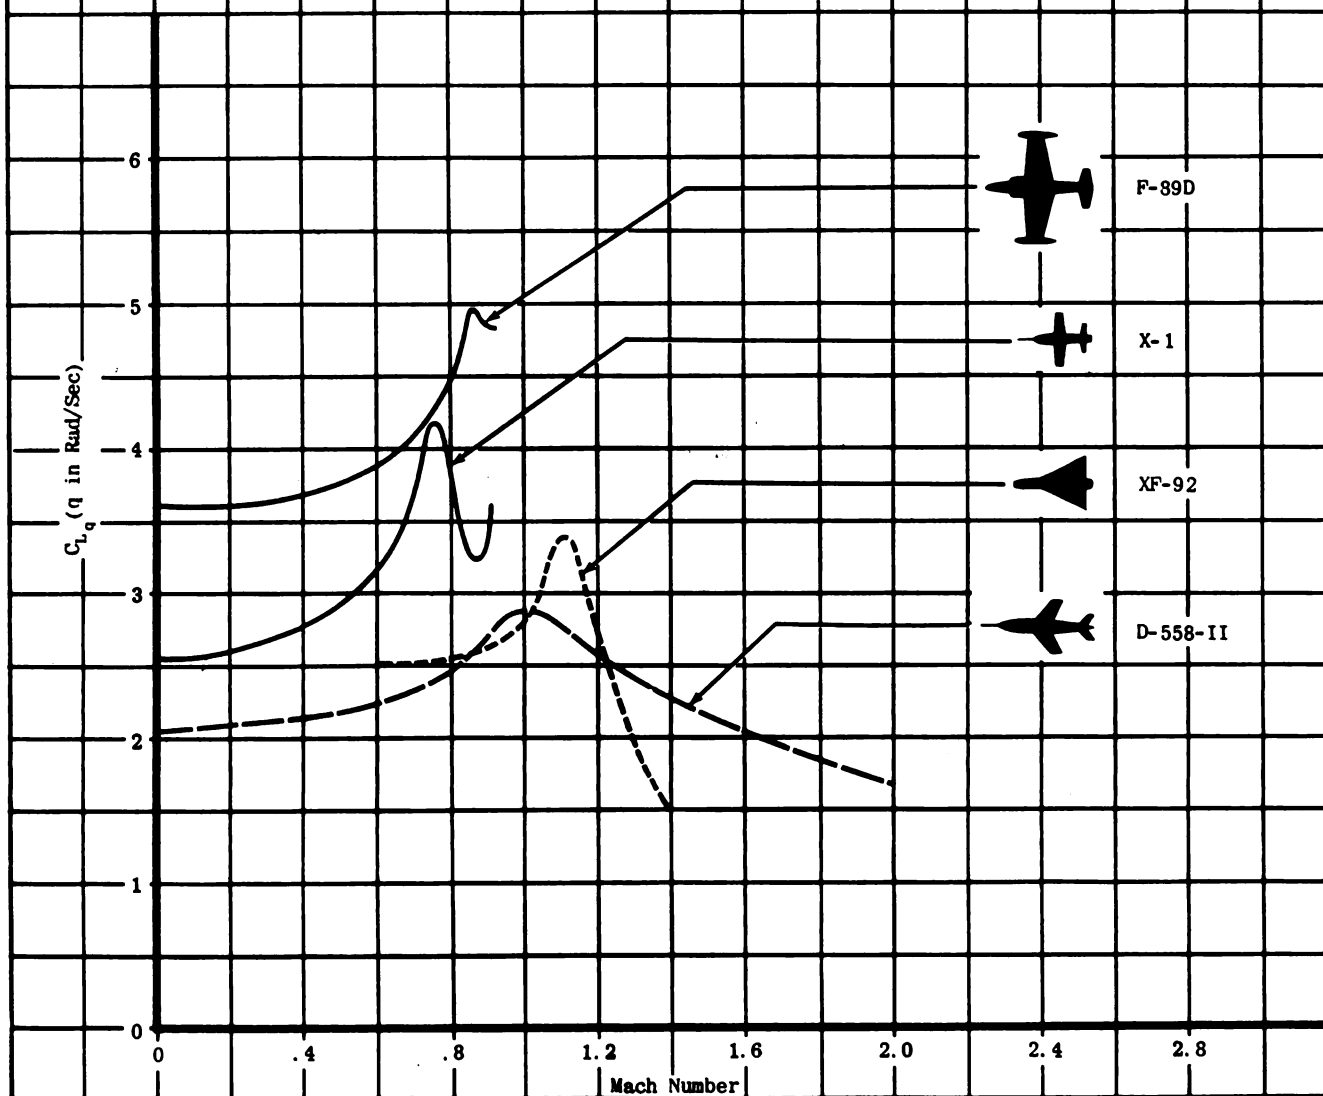


Figure A-8 Variation of C_{Lq} with Mach Number For Several High Speed Jet Aircraft

The estimated range of values of $C_{L_{\delta_g}}$ for present and near-future jet fighter type aircraft is from 0 to -0.6.

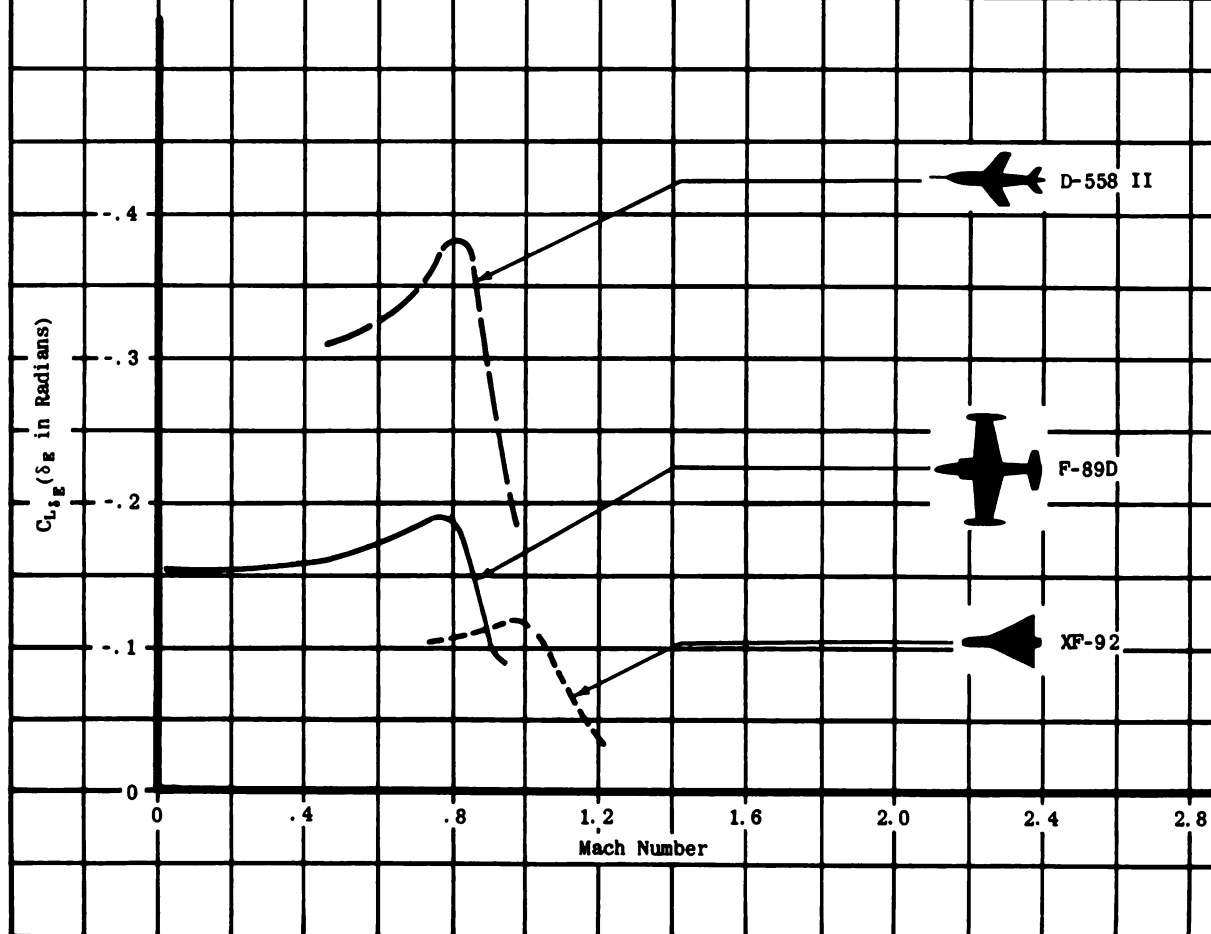


Figure A-9 Variation of $C_{L_{\delta_g}}$ with Mach Number for Several High Speed Jet Aircraft

The estimated range of values of C_{m_u} for present and near-future jet fighter type aircraft is from $-.2$ to $.5$.

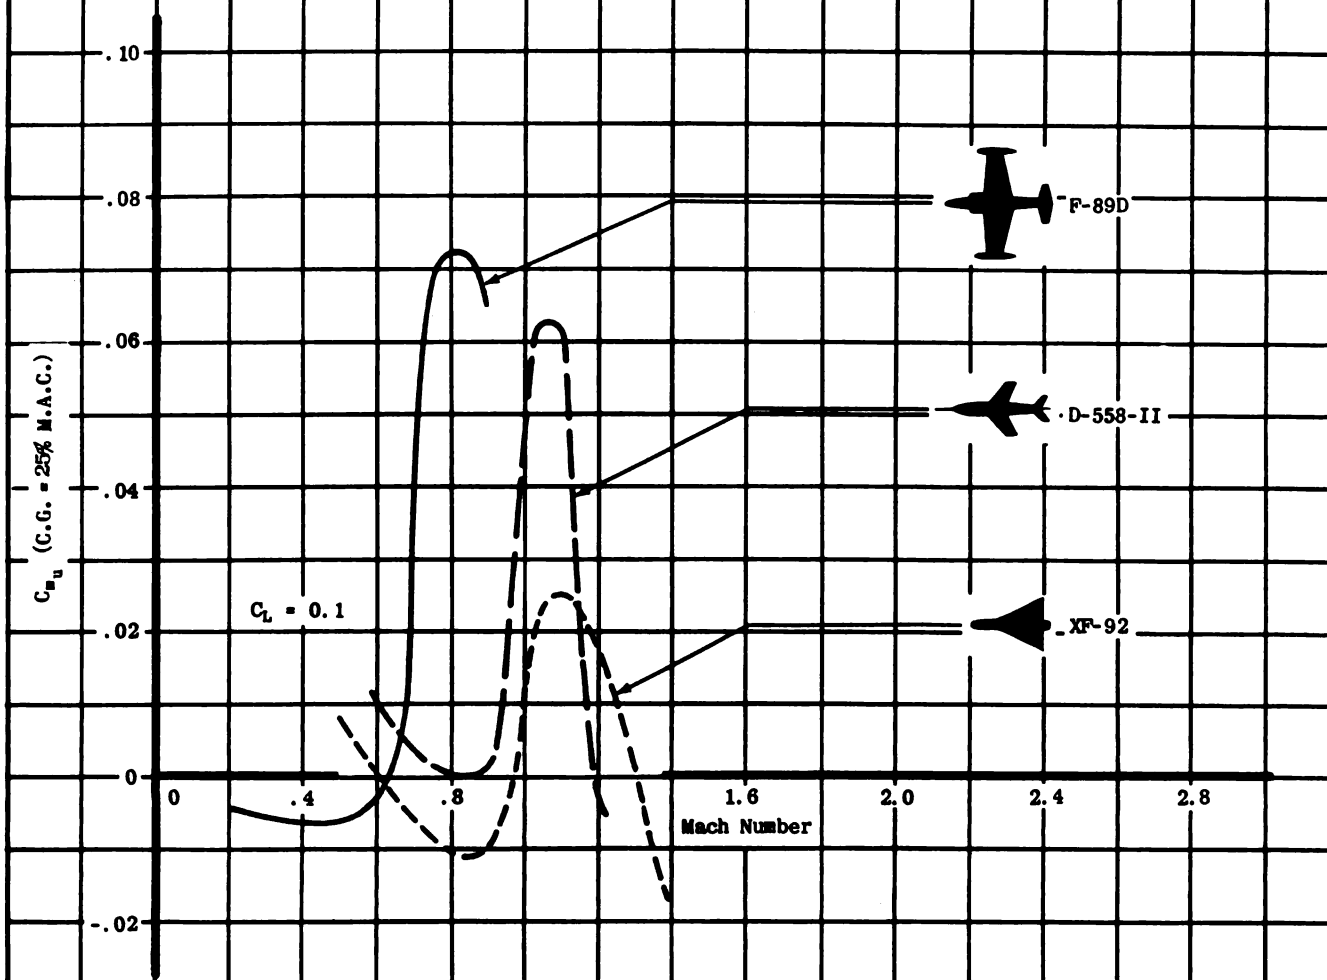


Figure A - 10 Variation of C_{m_u} with Mach Number for Several High Speed Jet Aircraft

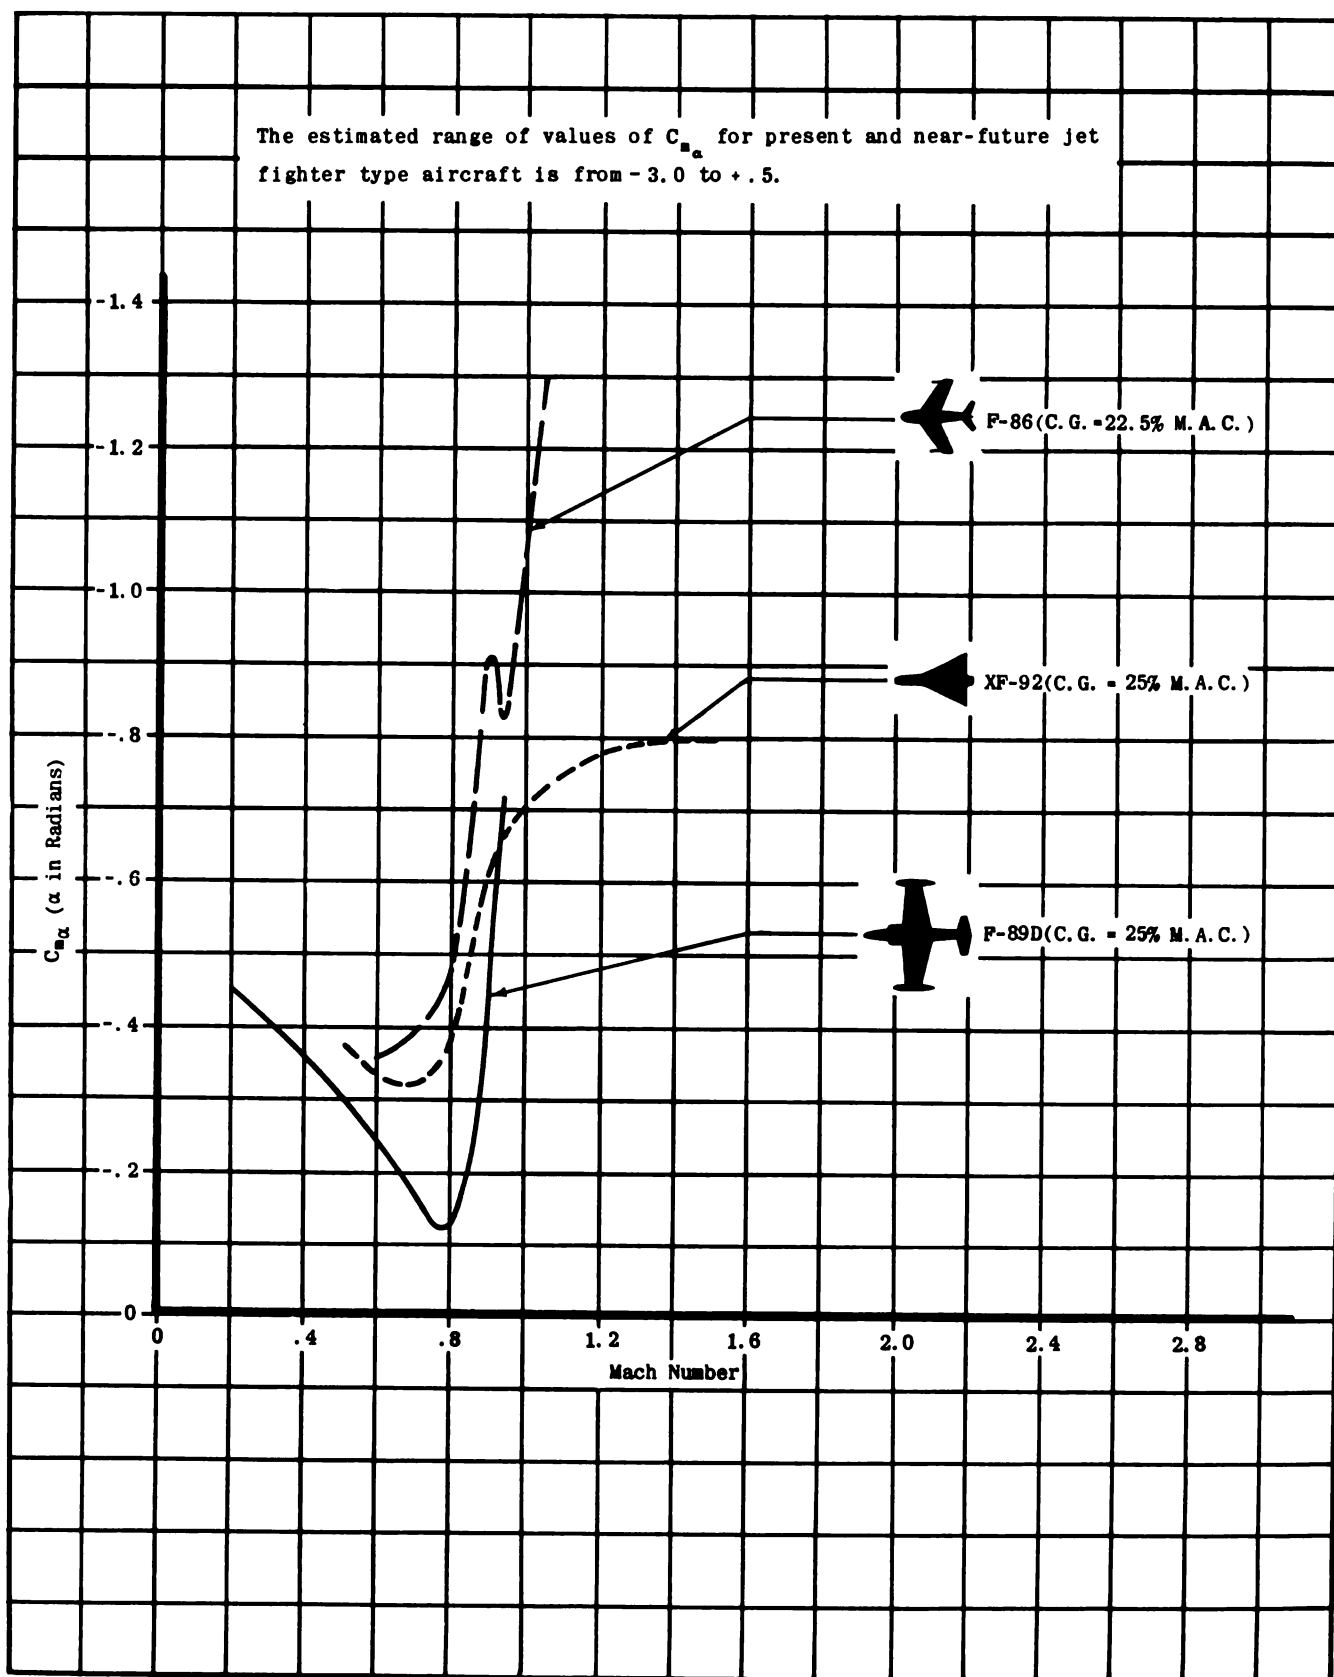


Figure A - 11 Variation of C_{m_α} with Mach Number for Several High Speed Jet Aircraft

For the XF-92, positive values are attained in the transonic and supersonic region. Although data concerning the performance of the other airplanes in the transonic region are scarce, it is probable that some of these configurations would exhibit positive values also. The estimated range of values of $C_{m\dot{\alpha}}$ for present and near-future jet fighter type aircraft is from -10 to +3.

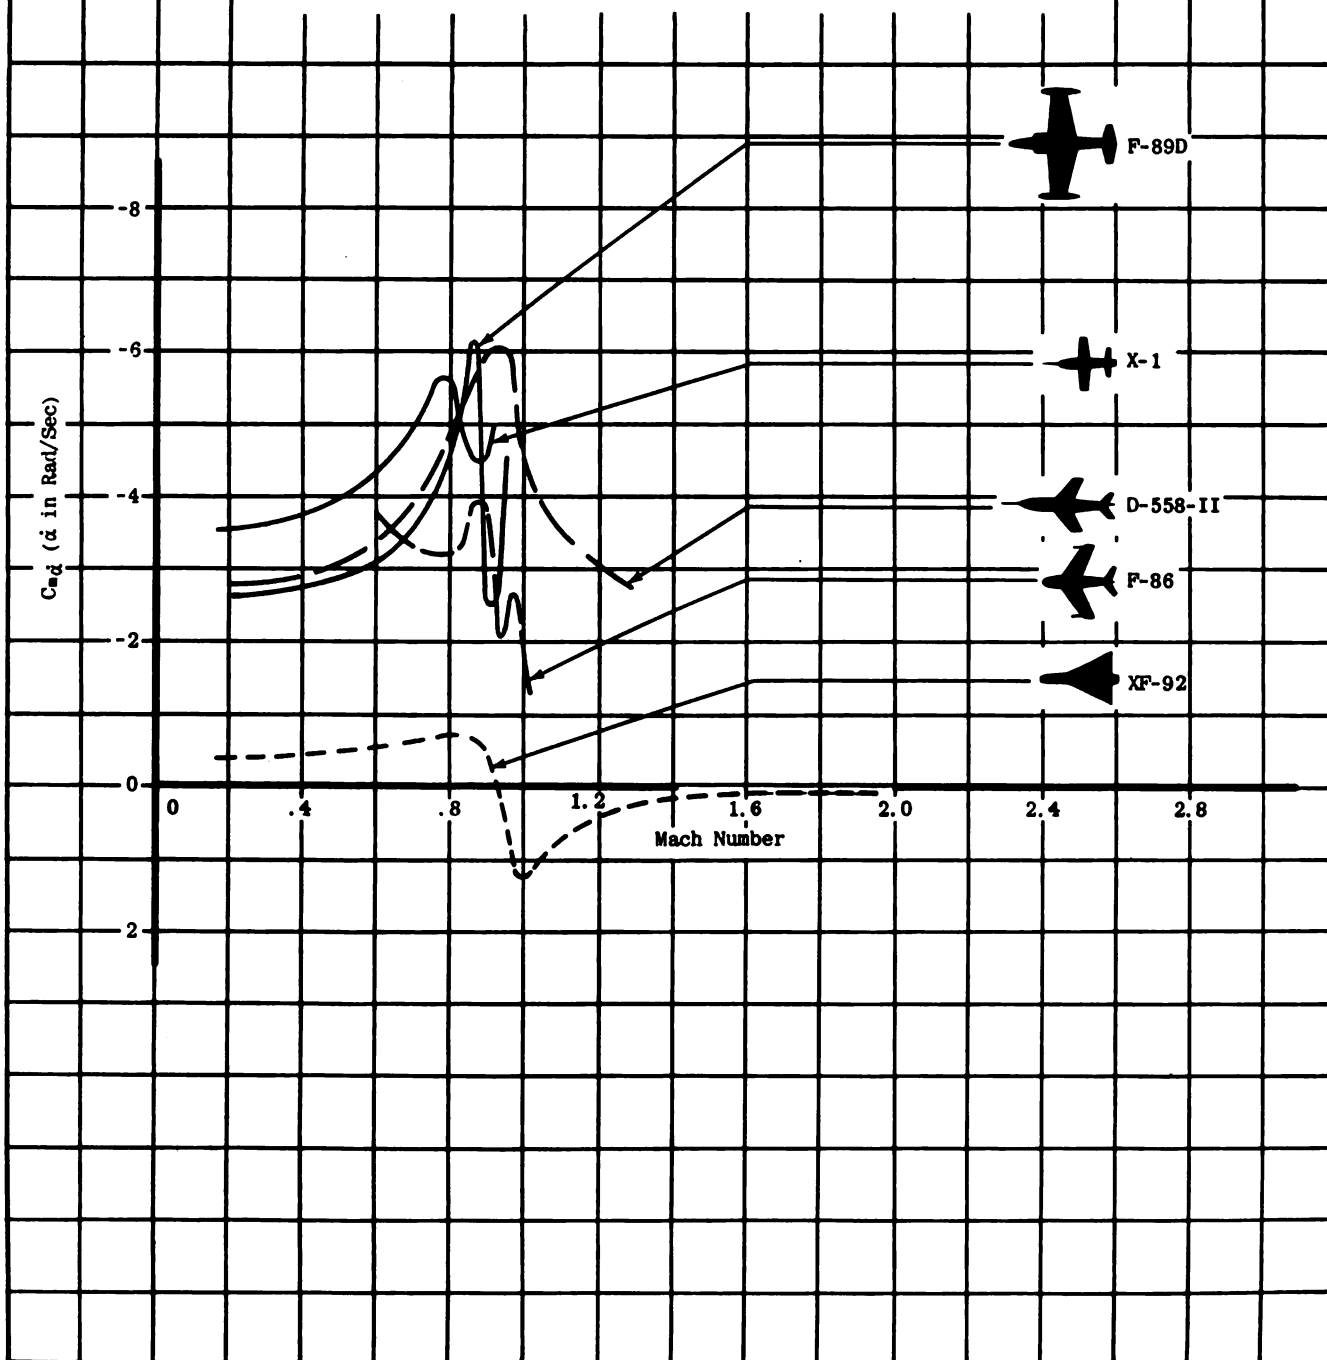


Figure A - 12 Variation of $C_{m\dot{\alpha}}$ with Mach Number for Several High Speed Jet Aircraft

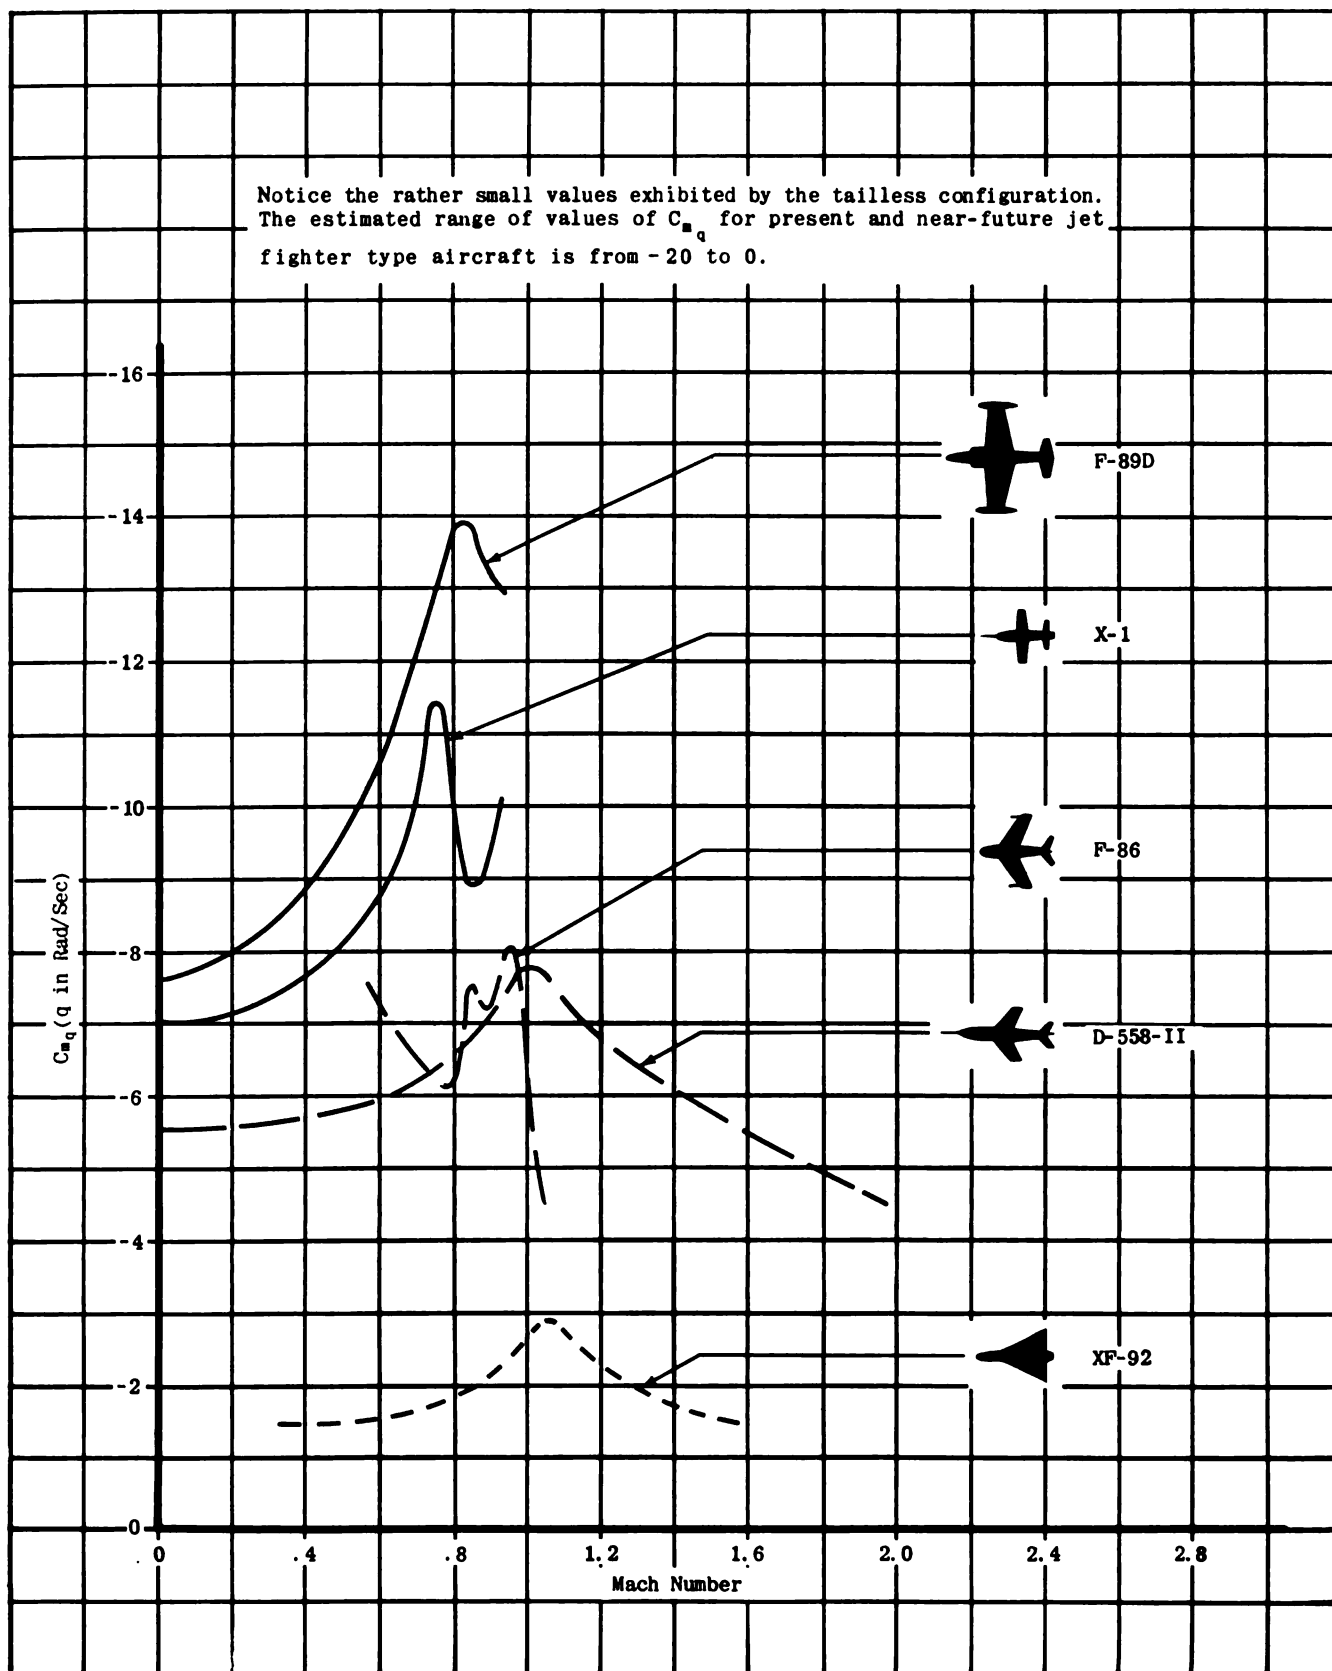


Figure A-13 Variation of C_{mq} with Mach Number for Several High Speed Jet Aircraft

For all configurations, the elevator becomes much less effective in the transonic region. The estimated range of values of $C_{m\delta_z}$ for present and near-future jet fighter type aircraft is from 0 to +1.5.

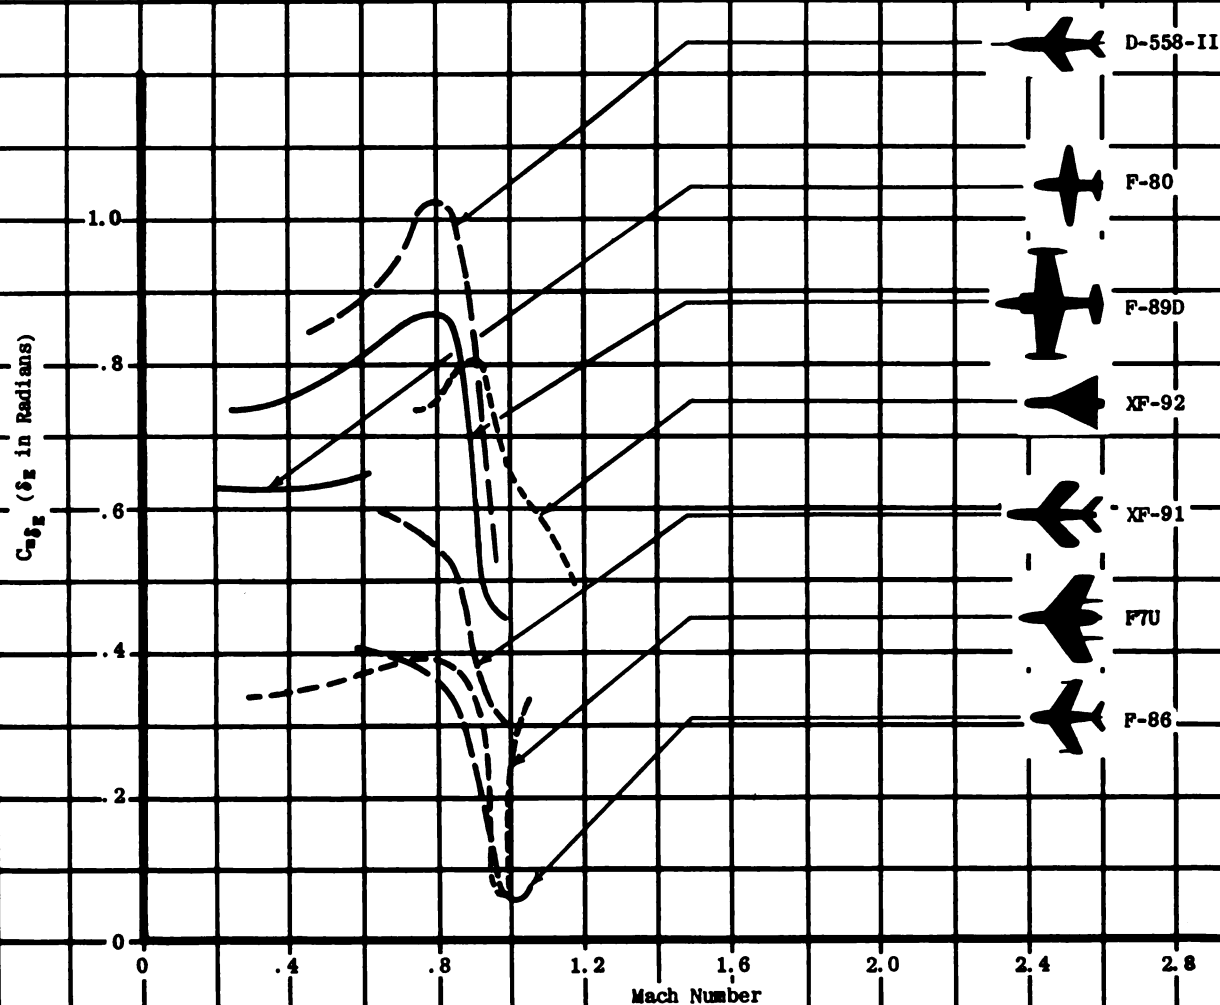


Figure A - 14 Variation of $C_{m\delta_z}$ with Mach Number for Several High Speed Jet Aircraft

Drake concludes that decreasing $C_{y\beta}$ improves the overall flight behavior.

(Drake, H.M., "The Effect of Lateral Area on the Lateral Stability and Control Characteristics of an Airplane as Determined by Tests of a Model in the Langley Free-Flight Tunnel," NACA Advance Restricted Report, ARR L5L05, Langley Memorial Aeronautical Laboratory, Langley Field, Va., February 1946.)

There is no apparent correlation between $C_{y\beta}$ values and wing planform type. The estimated range of values of $C_{y\beta}$ for present and near-future jet fighter type aircraft is from -0.1 to -1.5 .

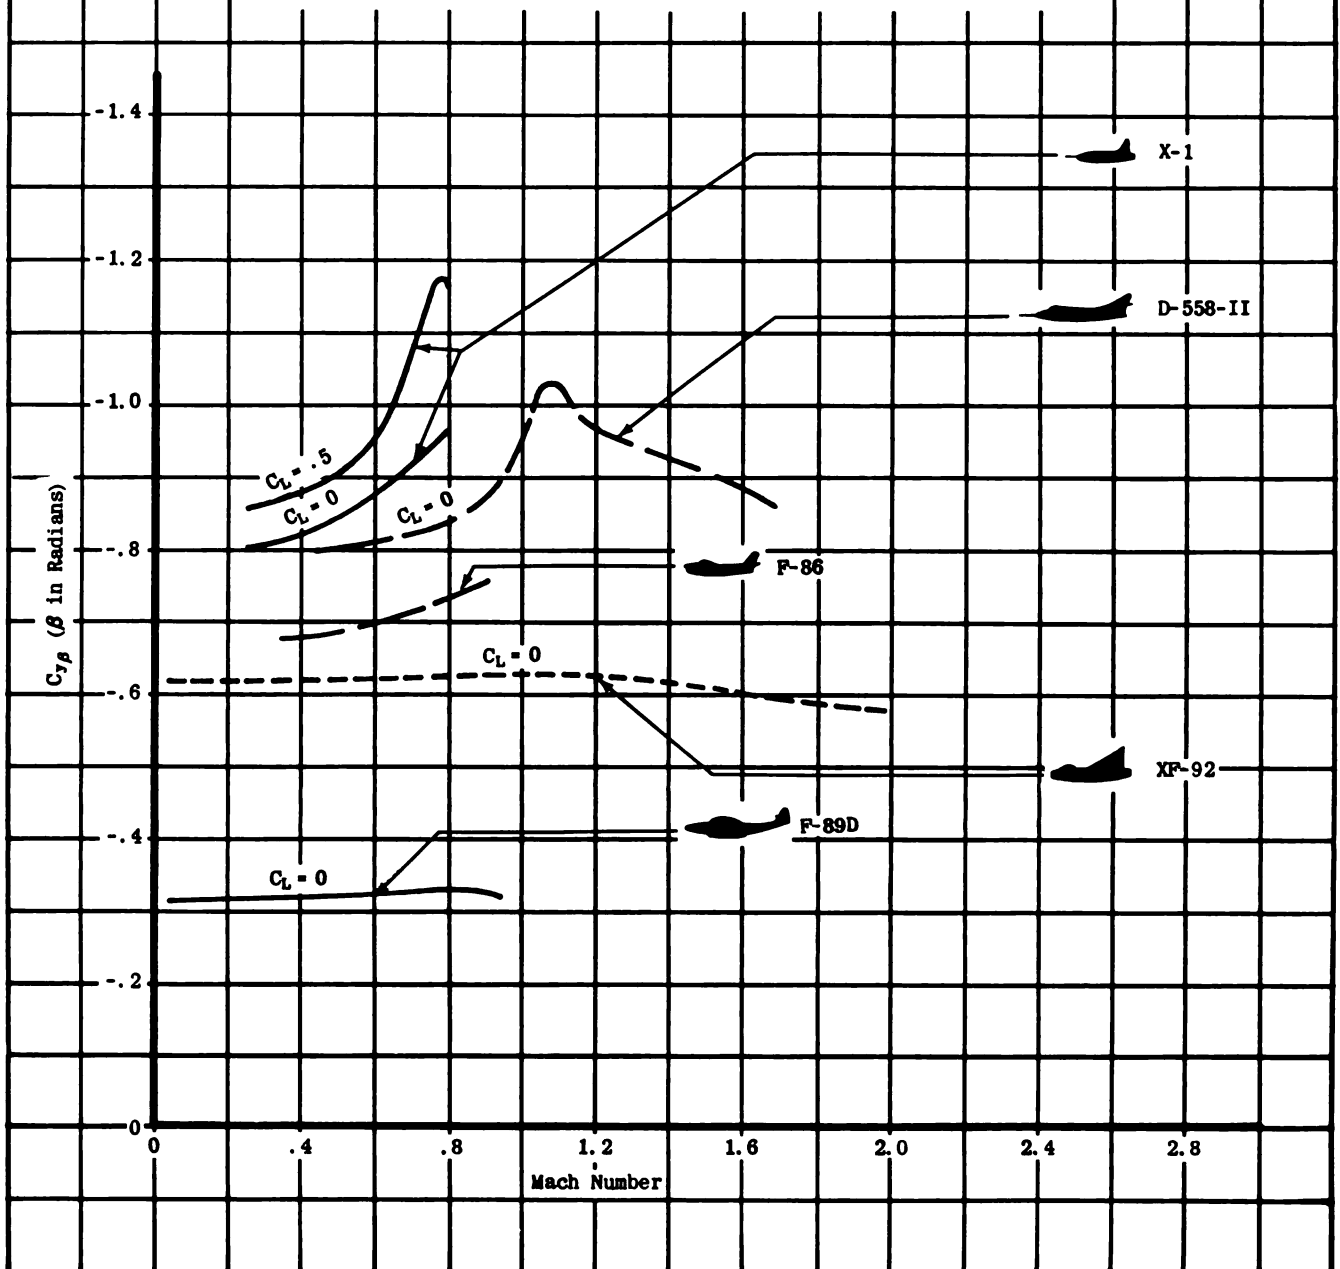


Figure A - 15 Variation of $C_{y\beta}$ with Mach Number for Several High Speed Jet Aircraft

The estimated range of values of C_{y_r} for present and near-future jet fighter type aircraft is from 0 to 1.2.

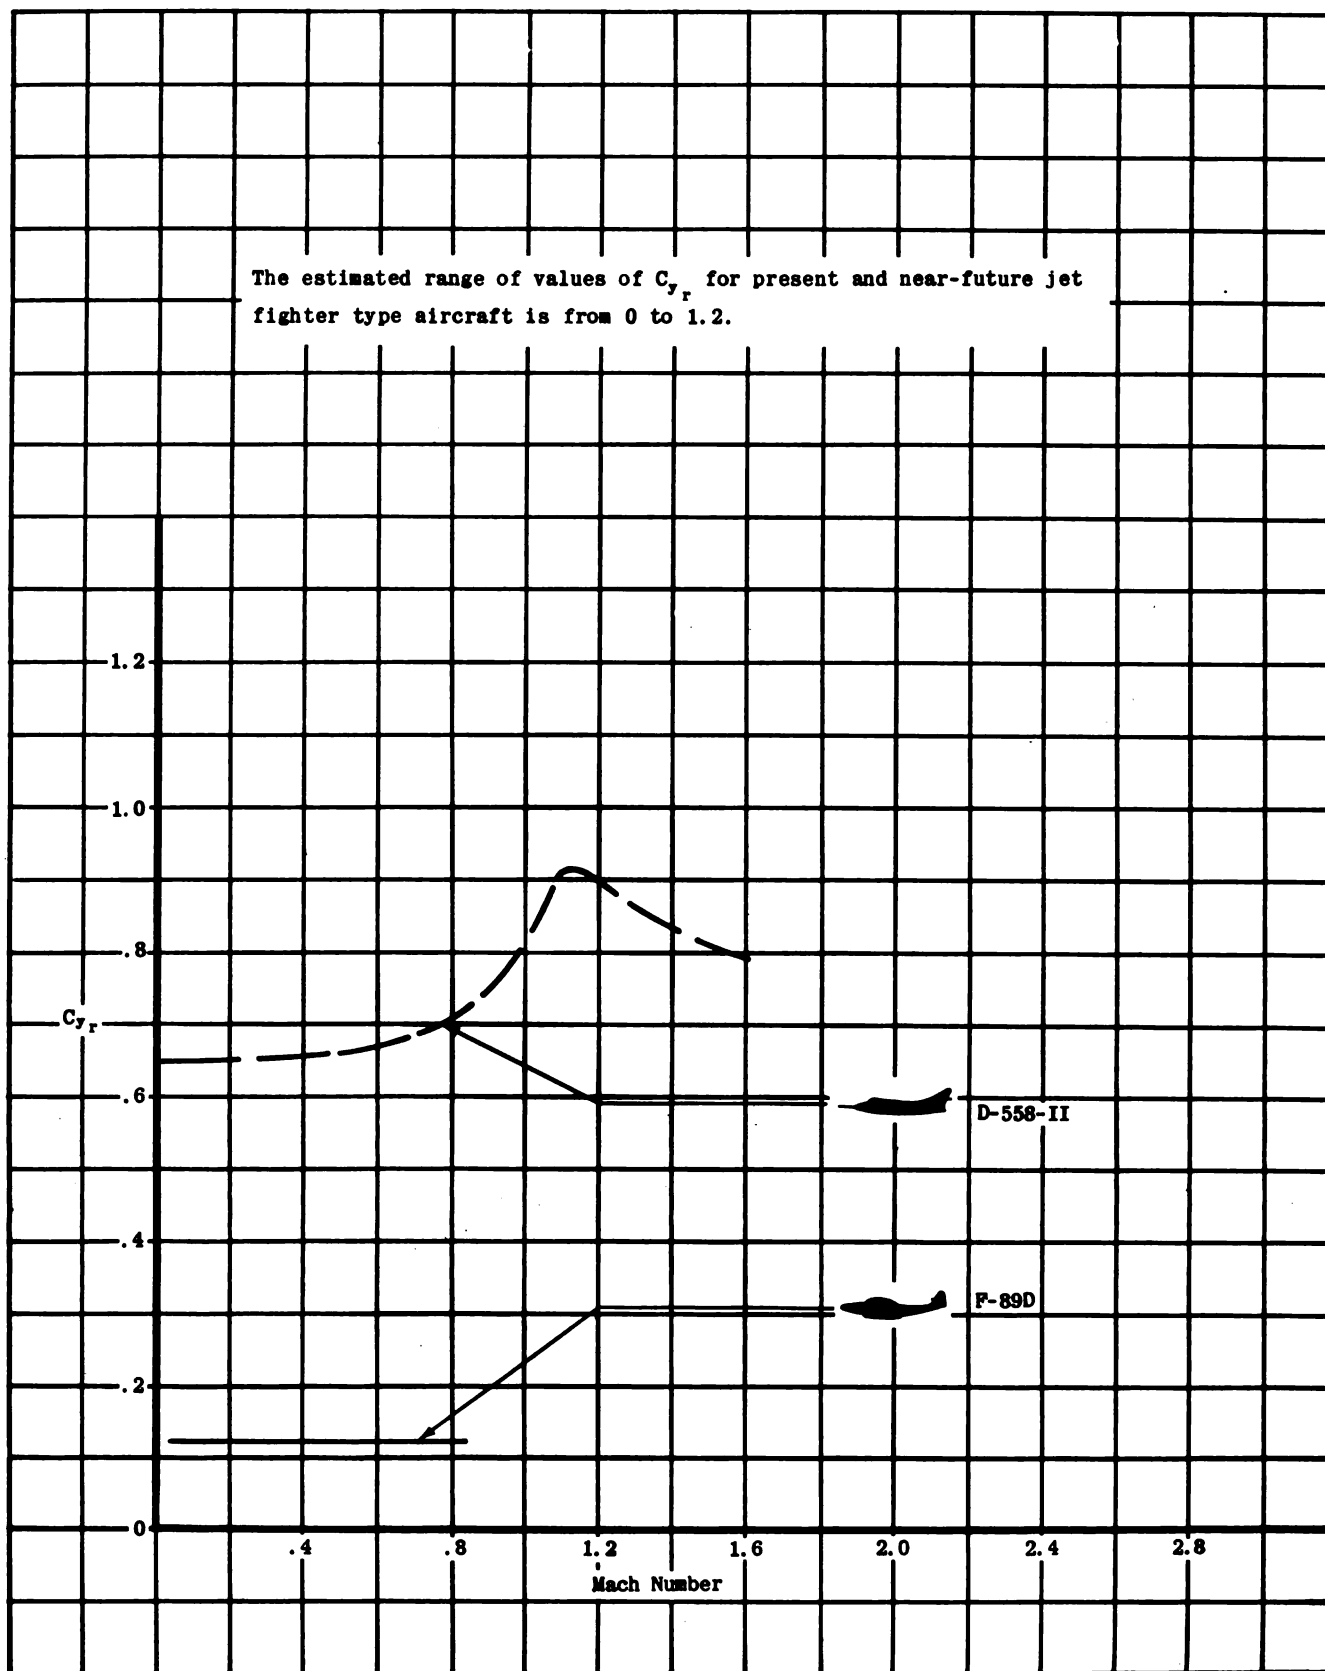


Figure A - 16 Variation of C_{y_r} with Mach Number for Several High Speed Jet Aircraft

The comparatively large effect of equilibrium lift coefficient or angle of attack on the values of this derivative should be noted. The estimated range of values of C_{yp} for present and near-future jet fighter type aircraft is from $-.3$ to $+.8$.

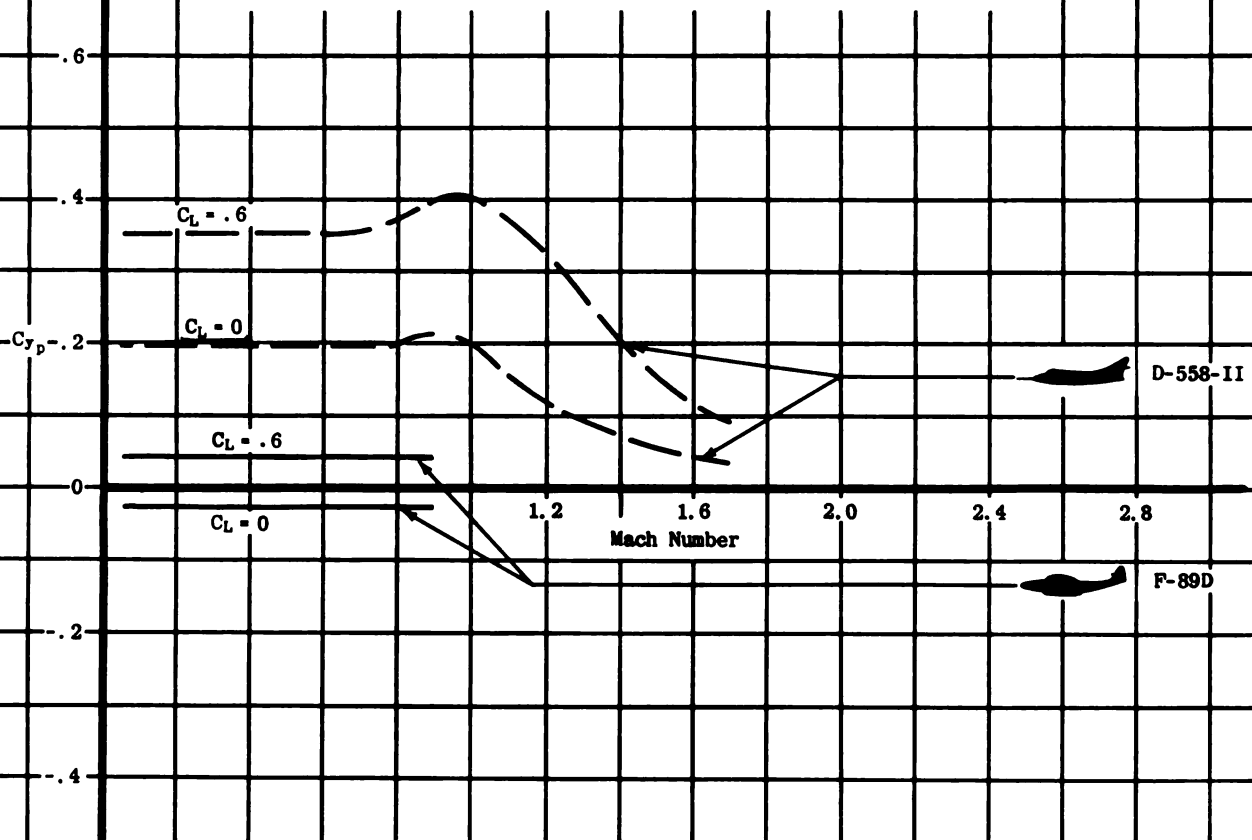


Figure A - 17 Variation of C_{yp} with Mach Number for Several High Speed Jet Aircraft

The estimated range of values of $C_{y_{\delta_R}}$ for present and near-future jet fighter type aircraft is from 0 to +.5.

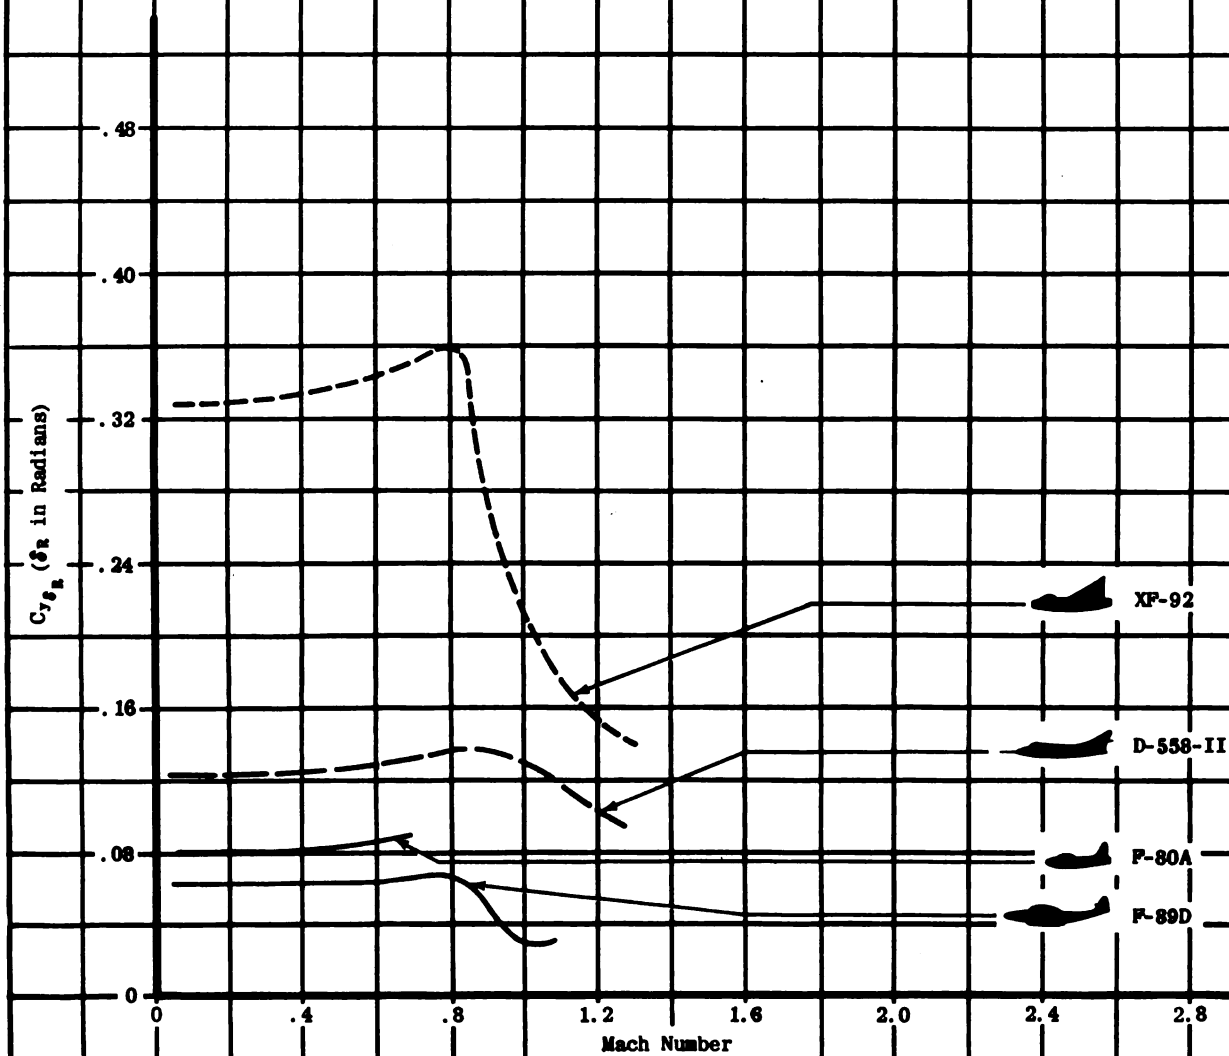


Figure A - 18 Variation of $C_{y_{\delta_R}}$ with Mach Number for Several High Speed Jet Aircraft

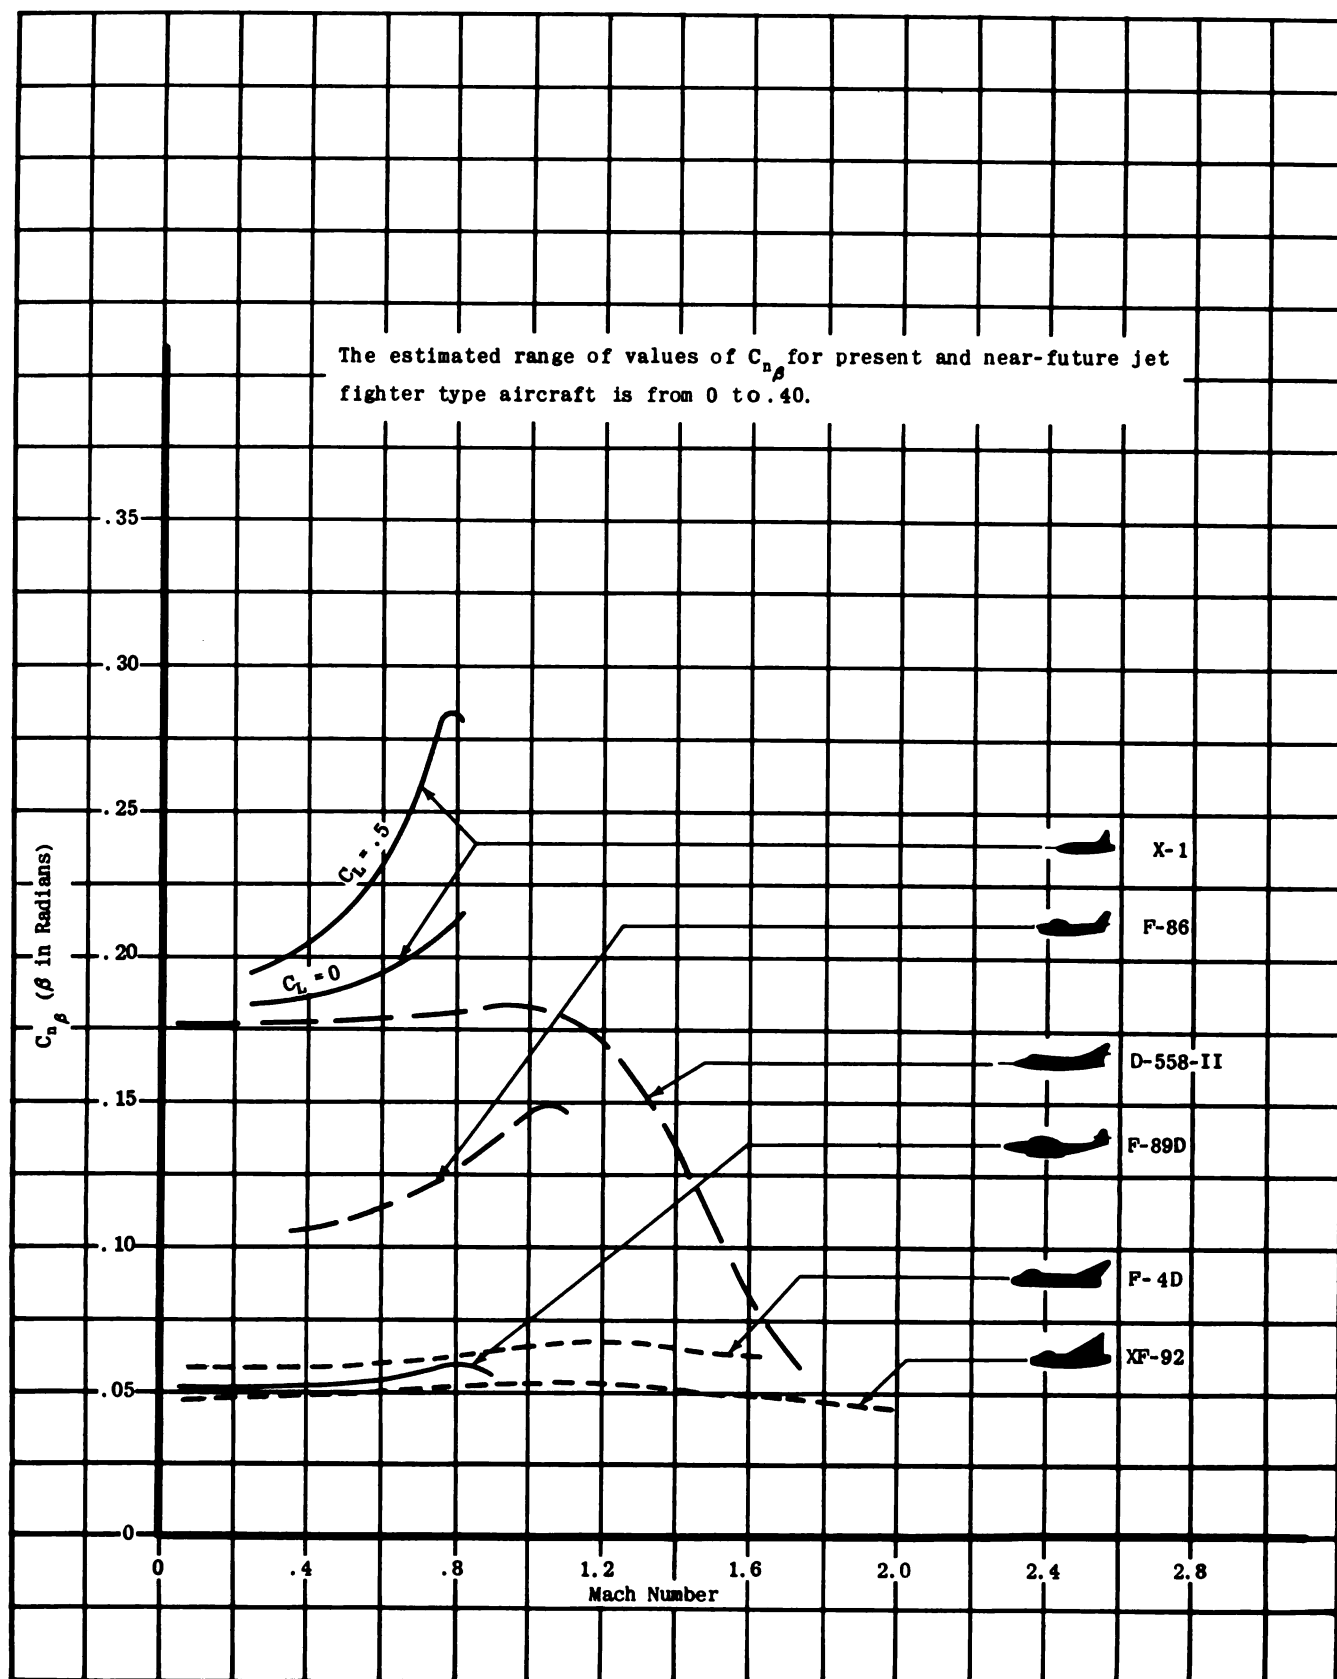


Figure A - 19 Variation of $C_{n\beta}$ with Mach Number for Several High Speed Jet Aircraft

Although the value of C_{n_r} is rather large for the D-558-II, this airplane exhibits poor Dutch roll damping characteristics; this emphasizes the fact that Dutch roll damping cannot be predicted merely by examining this derivative alone. The estimated range of values of C_{n_r} for present and near-future jet fighter type aircraft is from 0 to -1.0.

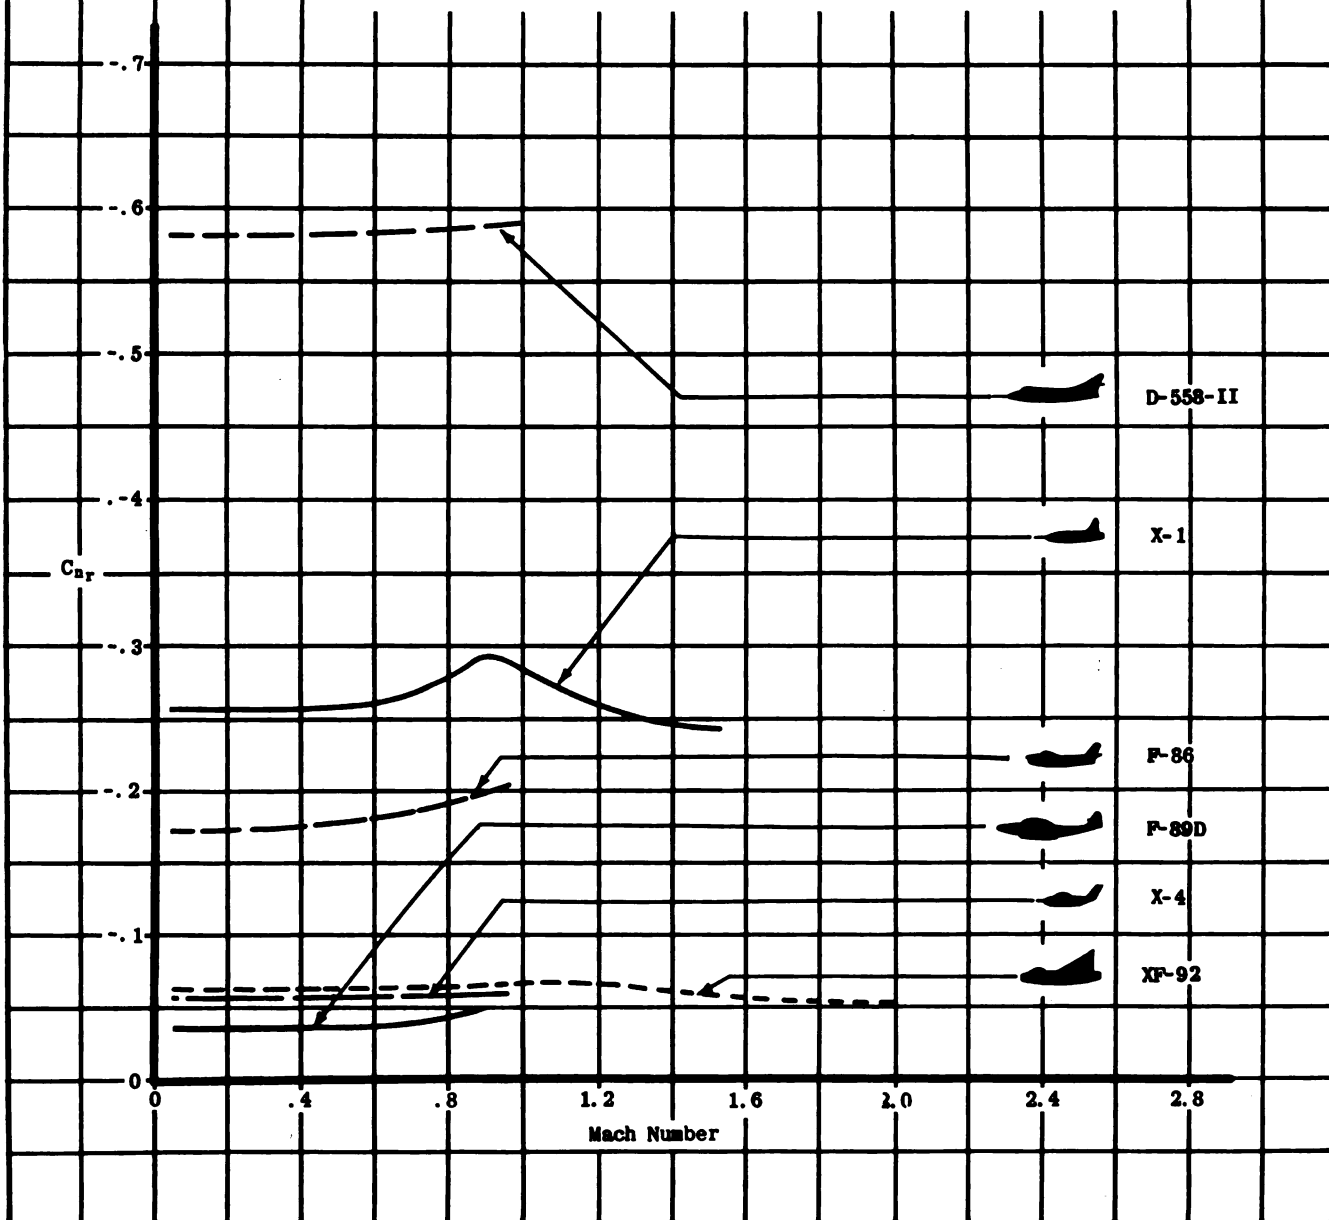


Figure A - 20 Variation of C_{n_r} with Mach Number for Several High Speed Jet Aircraft

The equilibrium lift coefficient has a great effect on this derivative. The estimated range of values of C_{n_p} for present and near-future jet fighter type aircraft is from $-.5$ to $+.1$.

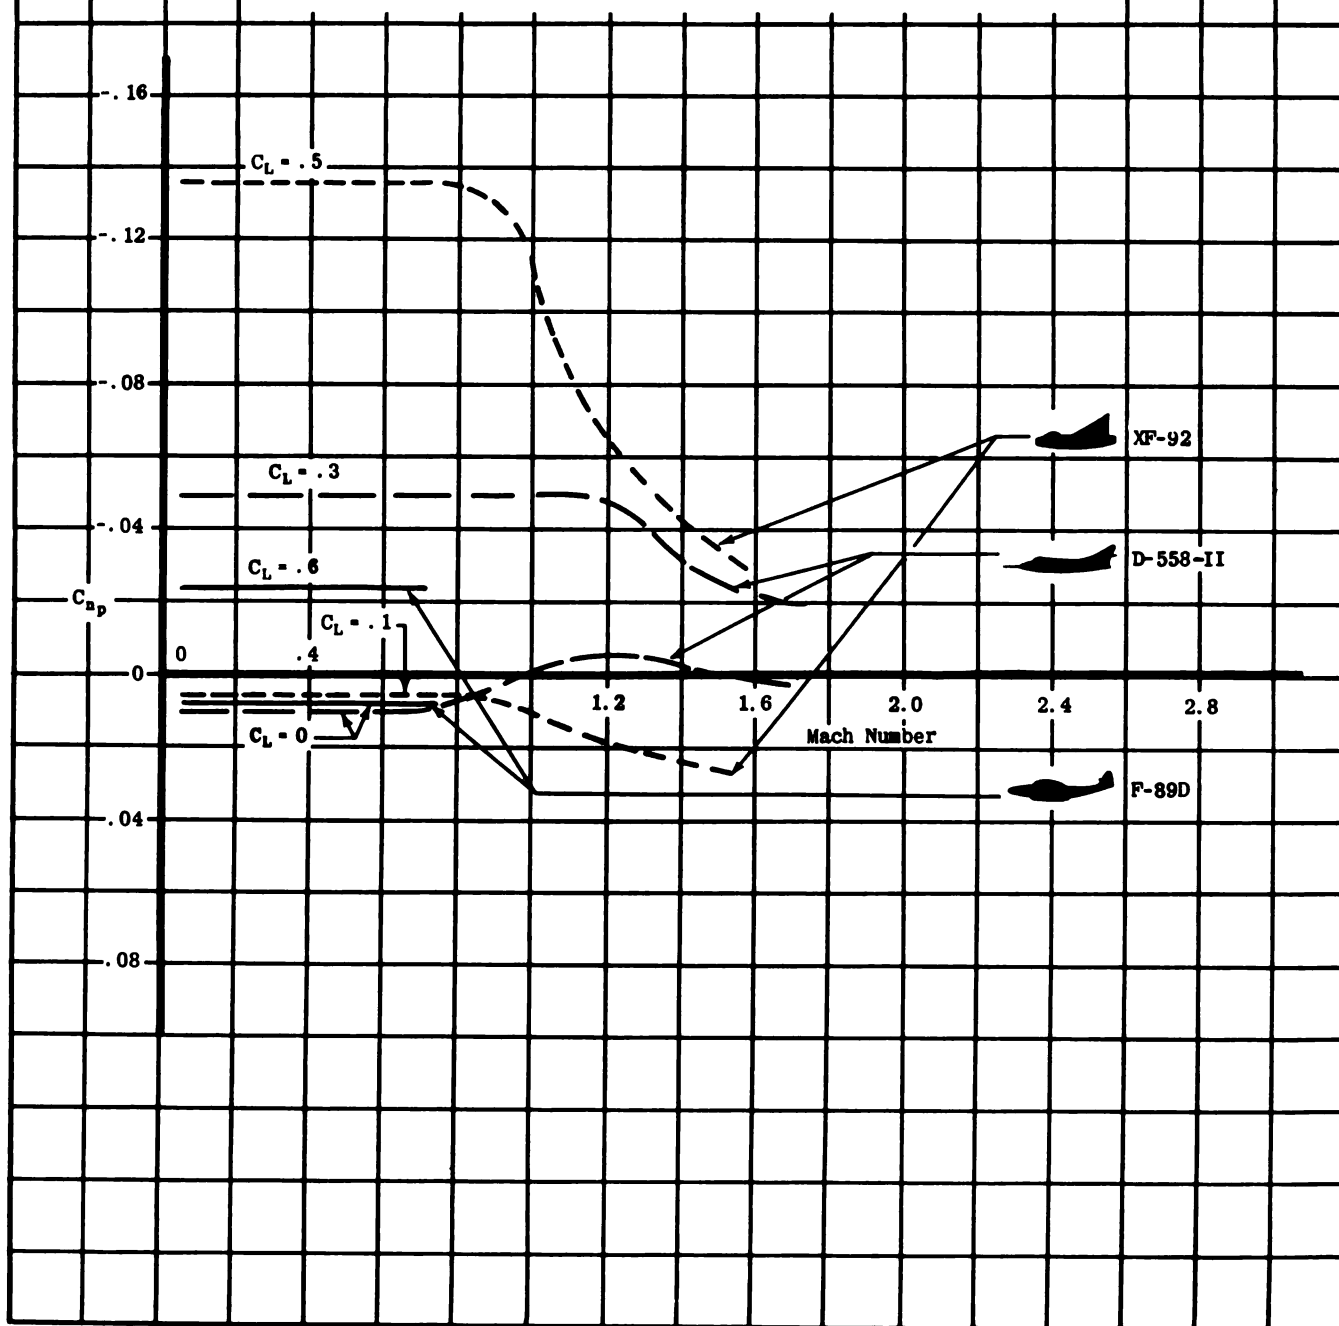


Figure A - 21 Variation of C_{n_p} with Mach Number for Several High Speed Jet Aircraft

For all configurations, rudder effectiveness decreases abruptly in the transonic region. The estimated range of values of $C_{n\delta_R}$ for present and near-future jet fighter type aircraft is from 0 to $-.15$.

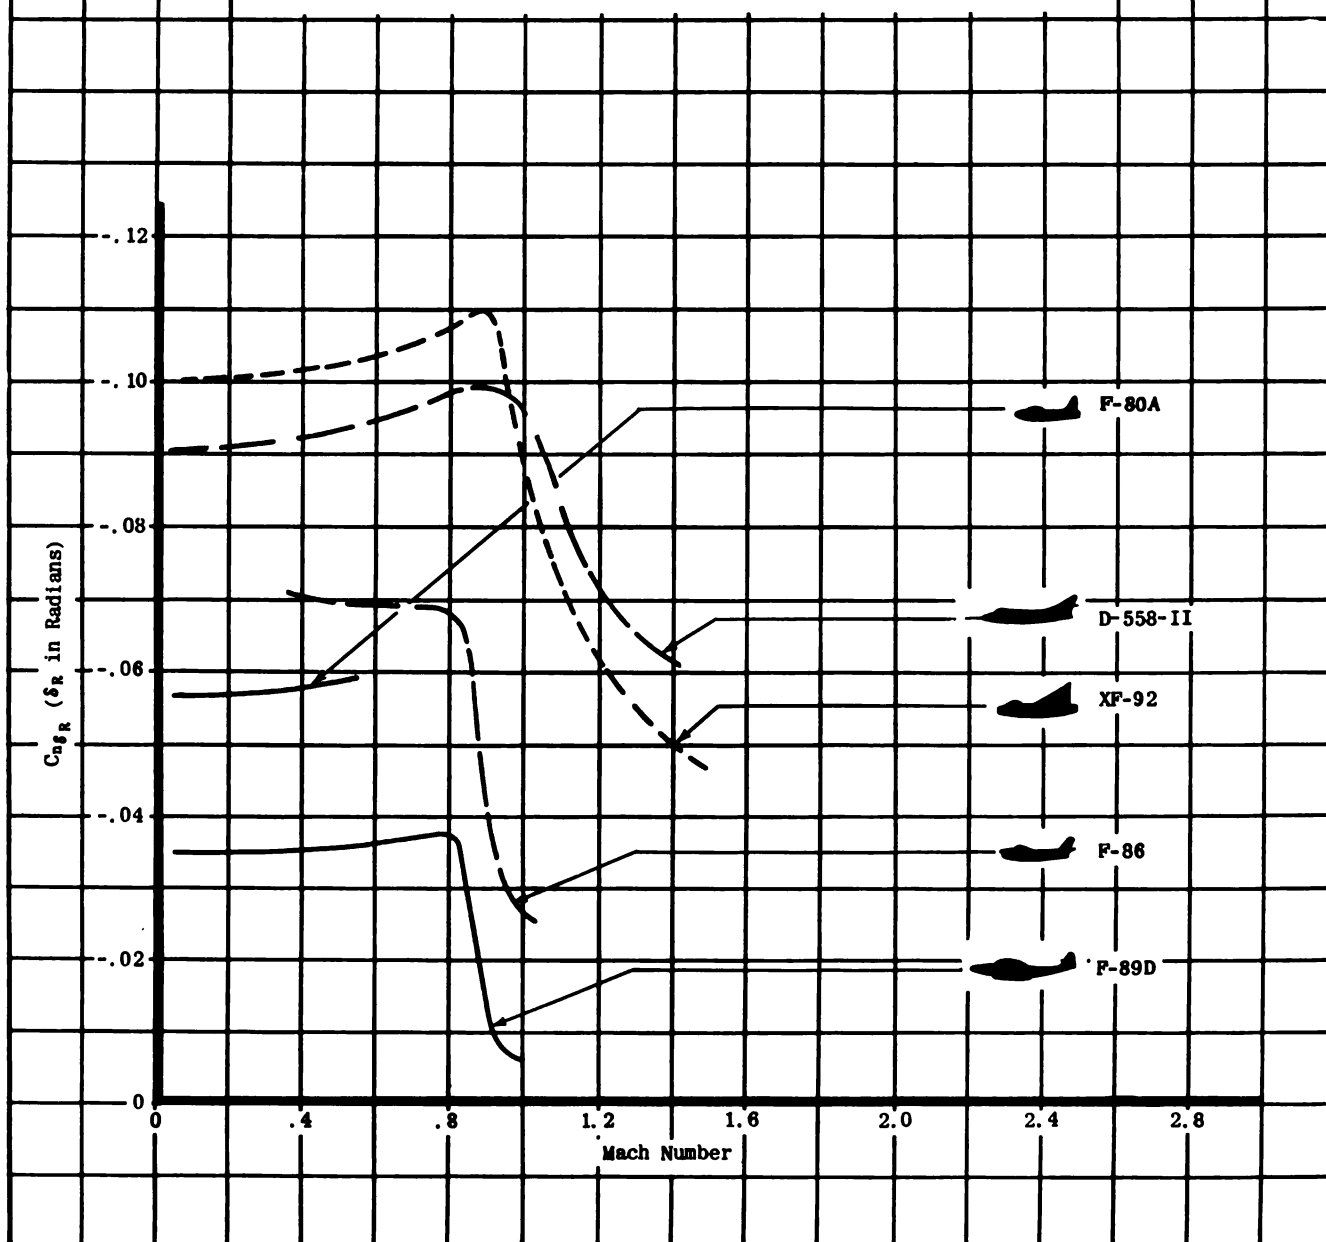


Figure A - 22 Variation of $C_{n\delta_R}$ with Mach Number for Several High Speed Jet Aircraft

The equilibrium lift coefficient has a great effect on this derivative. The estimated range of values of $C_{n_{\delta_A}}$ for present and near-future jet fighter type aircraft is from $-.08$ to $+.08$.

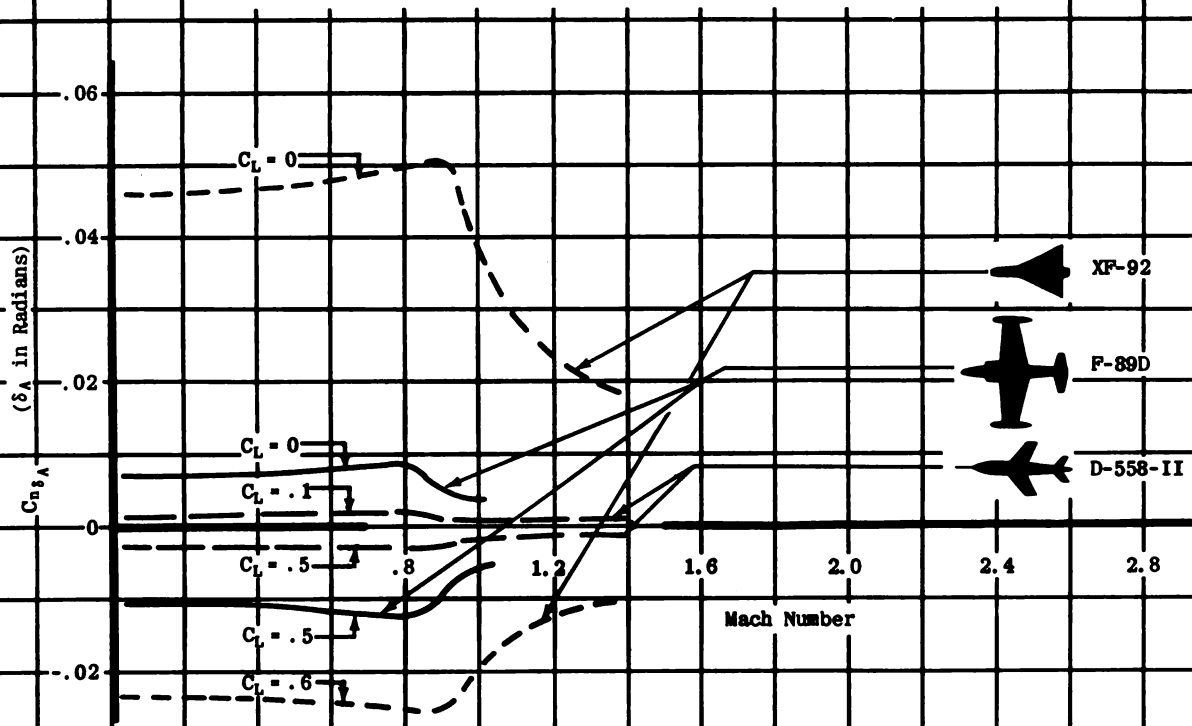


Figure A - 23 Variation of $C_{n_{\delta_A}}$ with Mach Number for Several High Speed Jet Aircraft

The equilibrium lift coefficient has a great effect on performance, especially for the delta wing configuration, but there is an abrupt decrease in its effect in the transonic range. The estimated range of values of C_{l_β} for present and near-future jet fighter type aircraft is from $-.30$ to $+.06$.

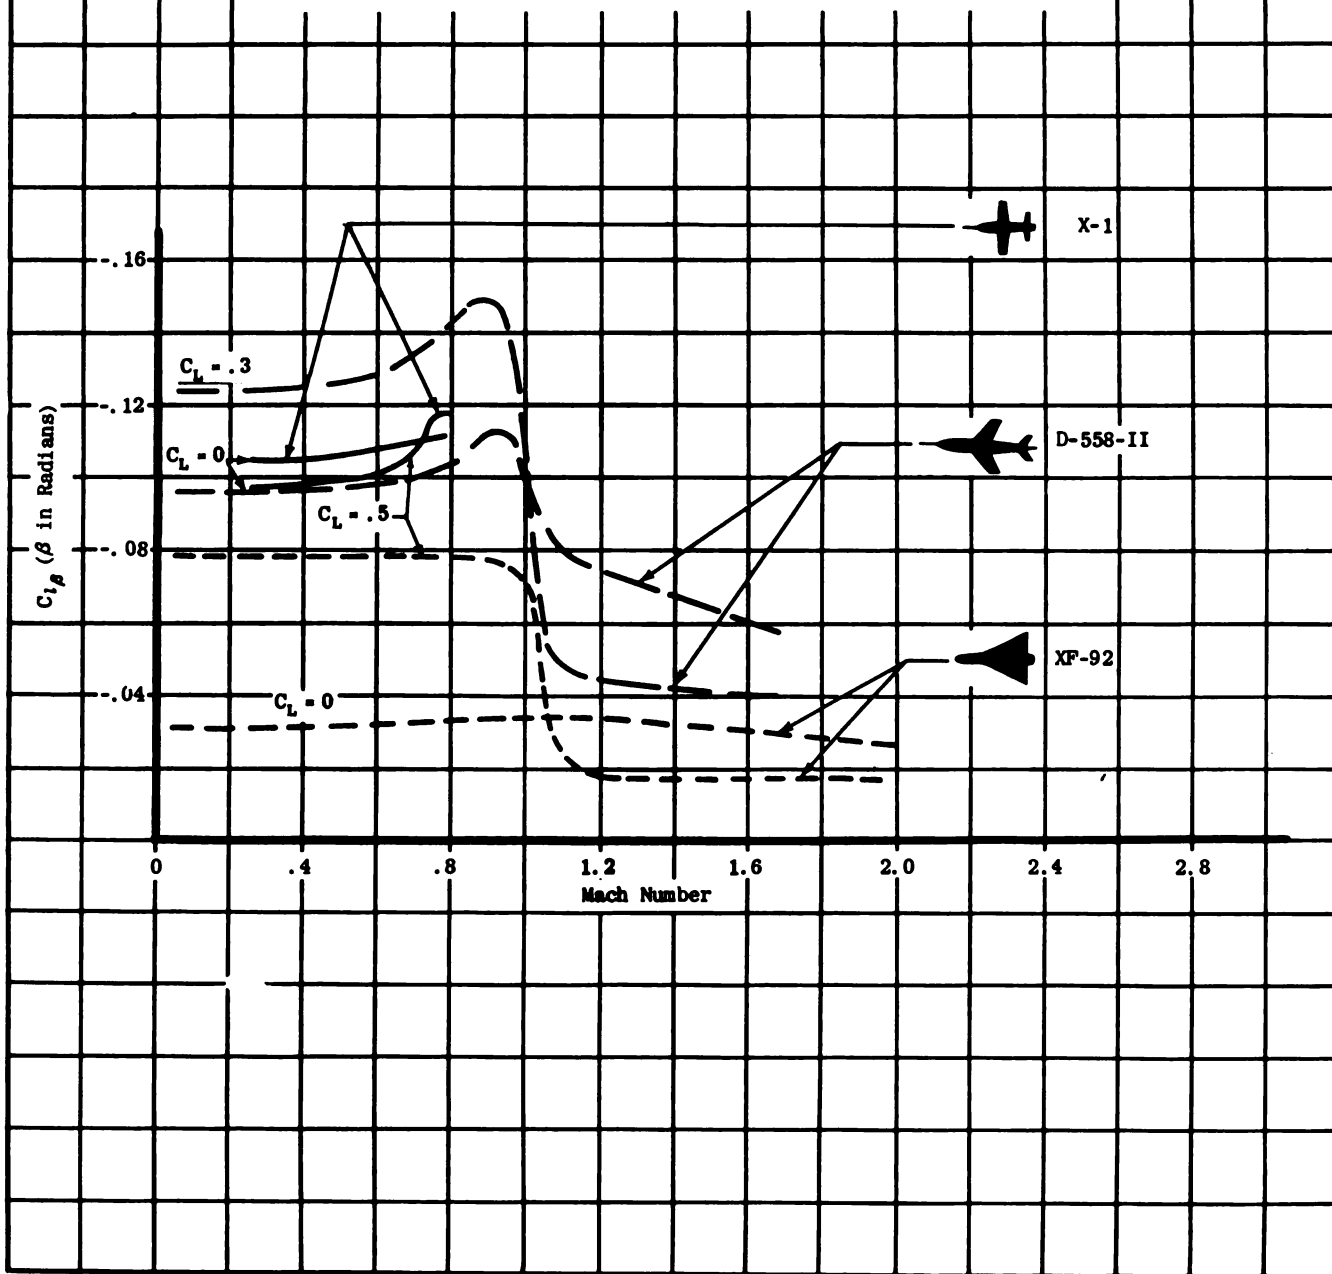


Figure A - 24 Variation of C_{l_β} with Mach Number for Several High Speed Jet Aircraft

The equilibrium lift coefficient has a great effect on this derivative, an effect caused by the vertical tail contribution. The estimated range of values of C_{L_r} for present and near-future jet fighter type aircraft is from 0 to .4.

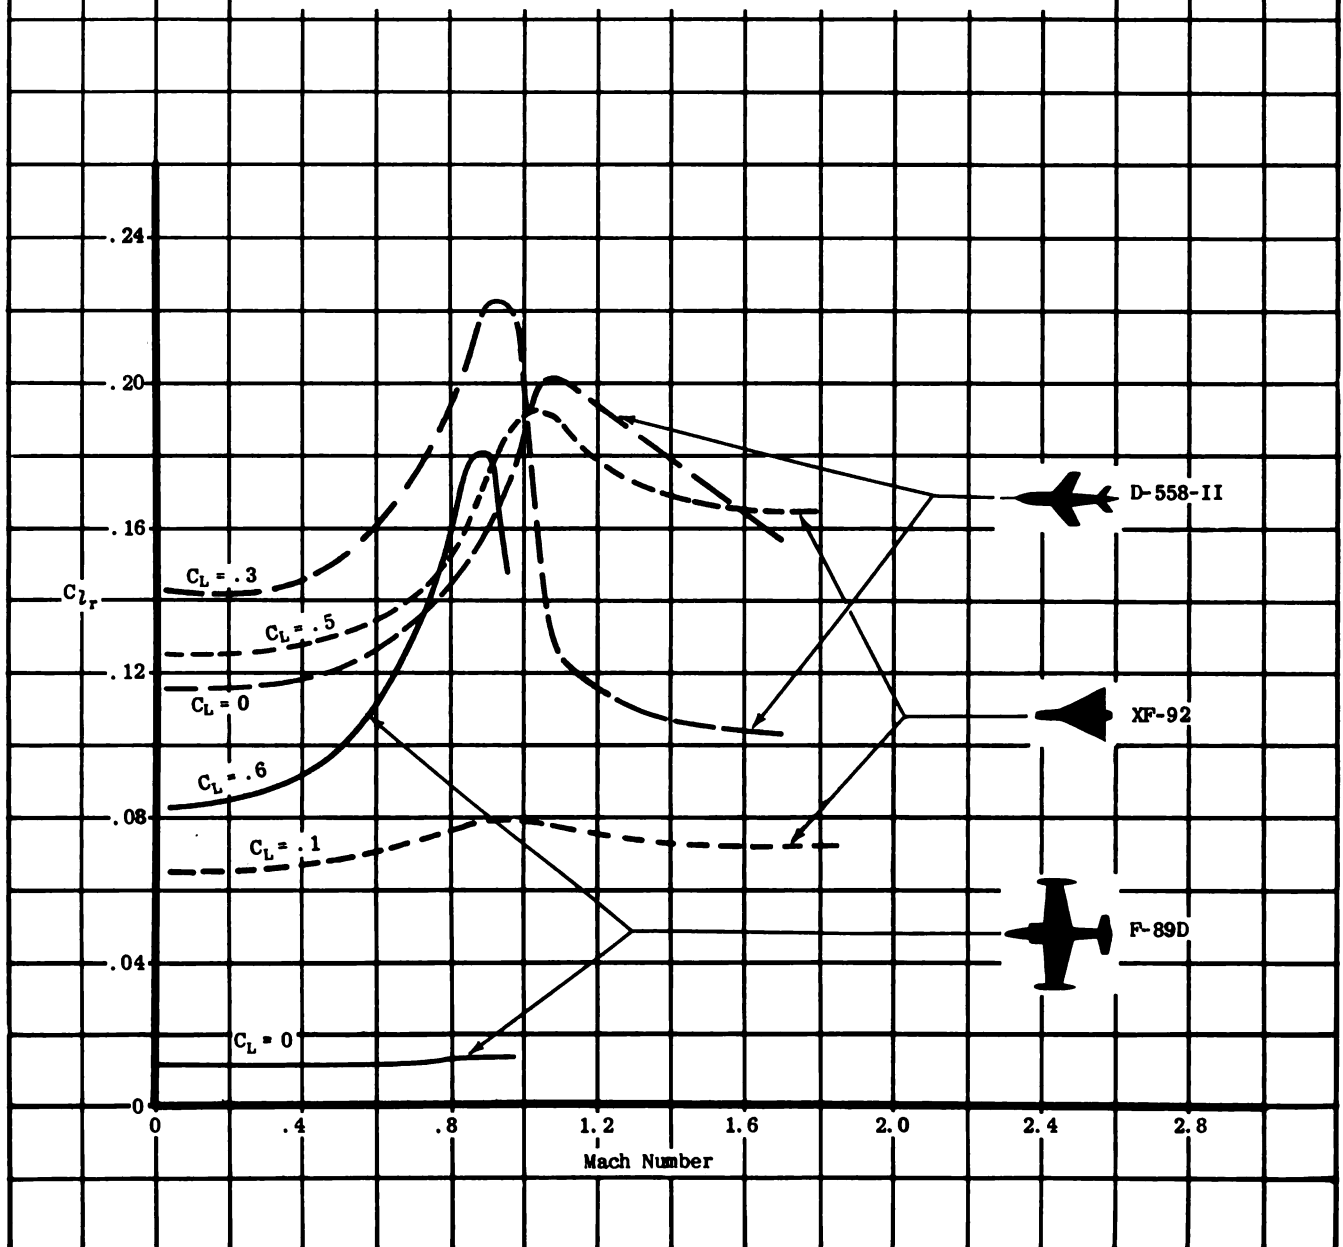


Figure A - 25 Variation of C_{L_r} with Mach Number for Several High Speed Jet Aircraft

The trends with Mach Number are seen to be similar to those for C_{l_a} .
The estimated range of values of C_{l_p} for present and near-future jet fighter type aircraft is from $-.1$ to $-.8$.

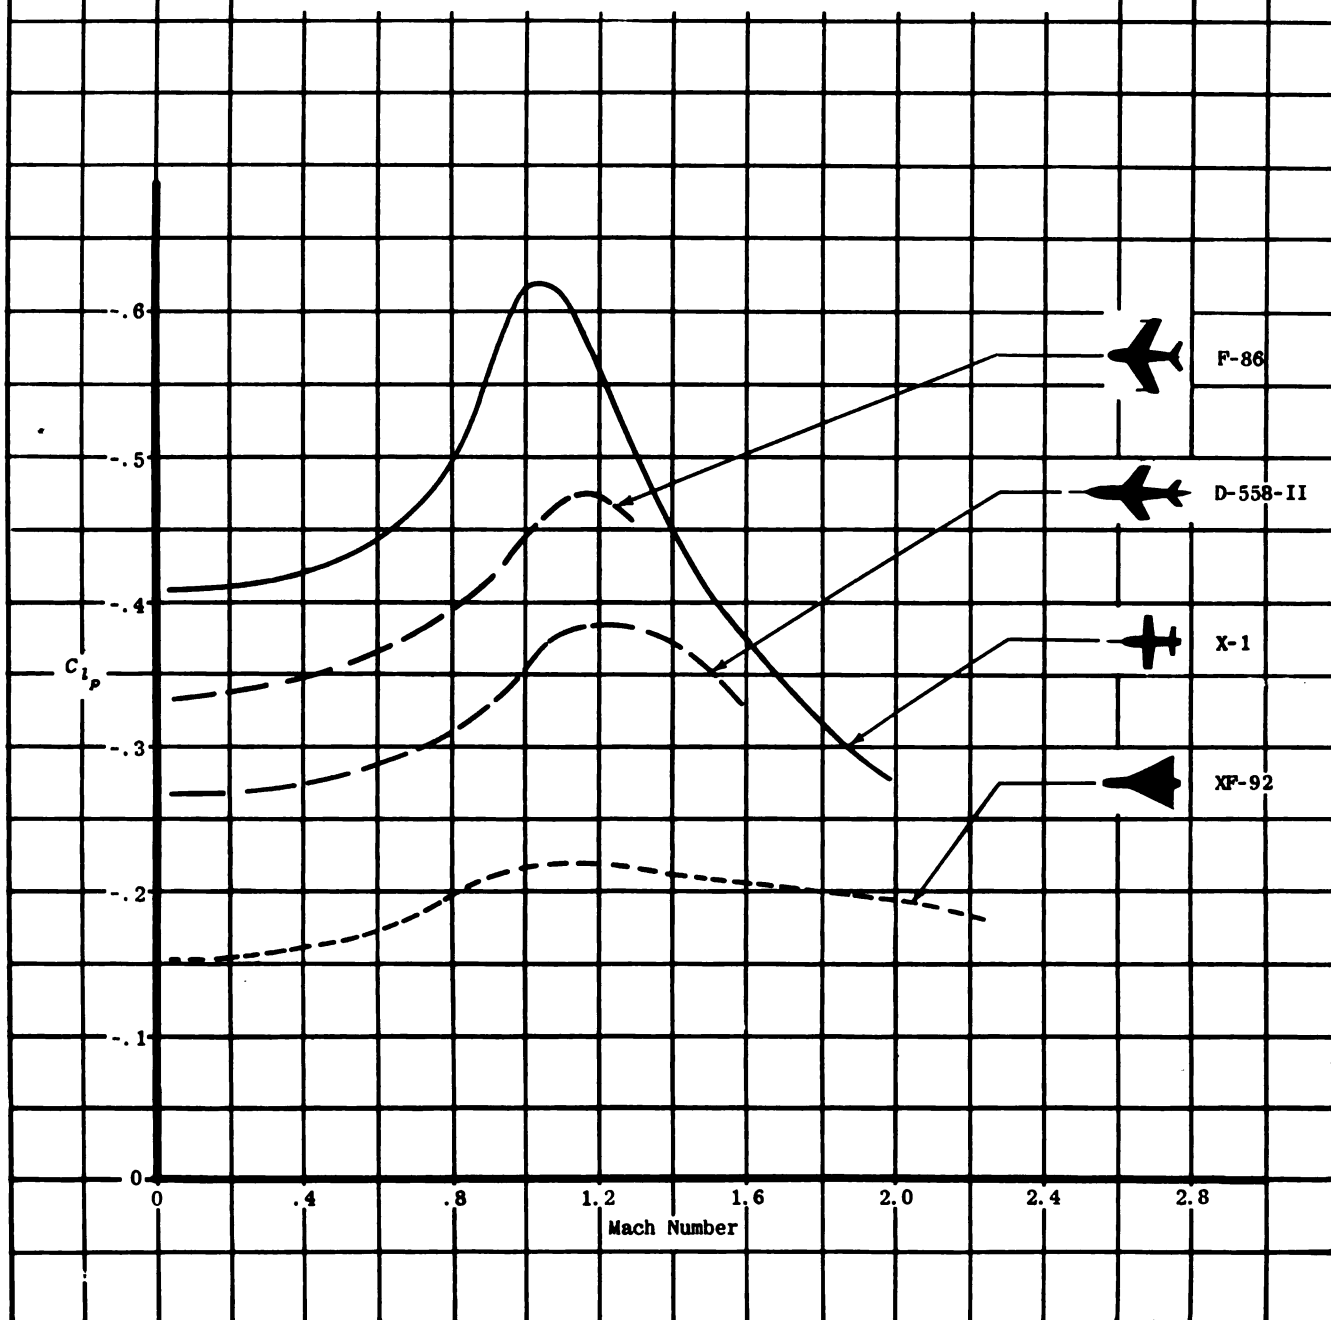


Figure A - 26 Variation of C_{l_p} with Mach Number for Several High Speed Jet Aircraft

The equilibrium lift coefficient has a great effect on this derivative. The estimated range of values of C_{L_R} for present and near-future jet fighter type aircraft is from -0.04 to $+0.04$.

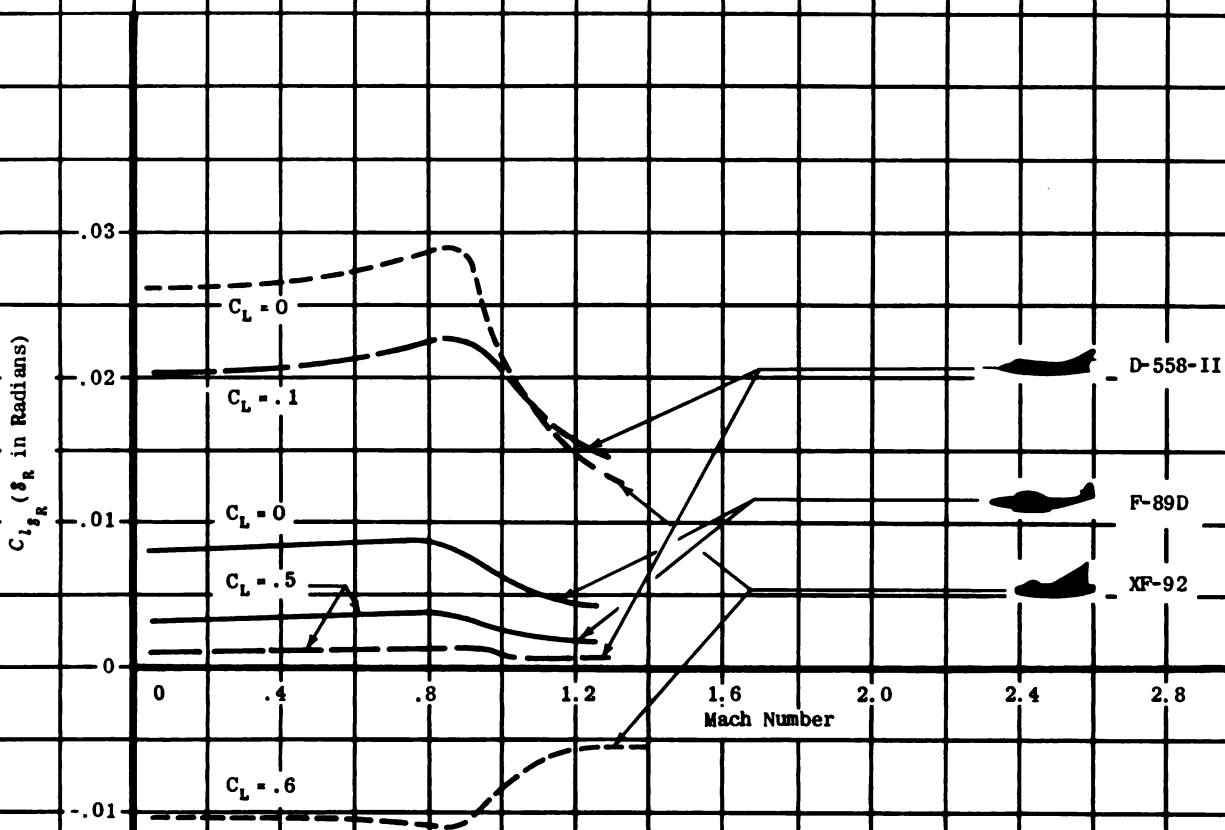


Figure A - 27 Variation of $C_{L,R}$ with Mach Number for Several High Speed Jet Aircraft

There is a considerable decrease in aileron effectiveness in the transonic region. Although not indicated in this figure, this decrease is more pronounced when aeroelastic effects are taken into account. The estimated range of values of $C_{l_{\delta_A}}$ for present and near-future jet fighter type aircraft is from 0 to .30.

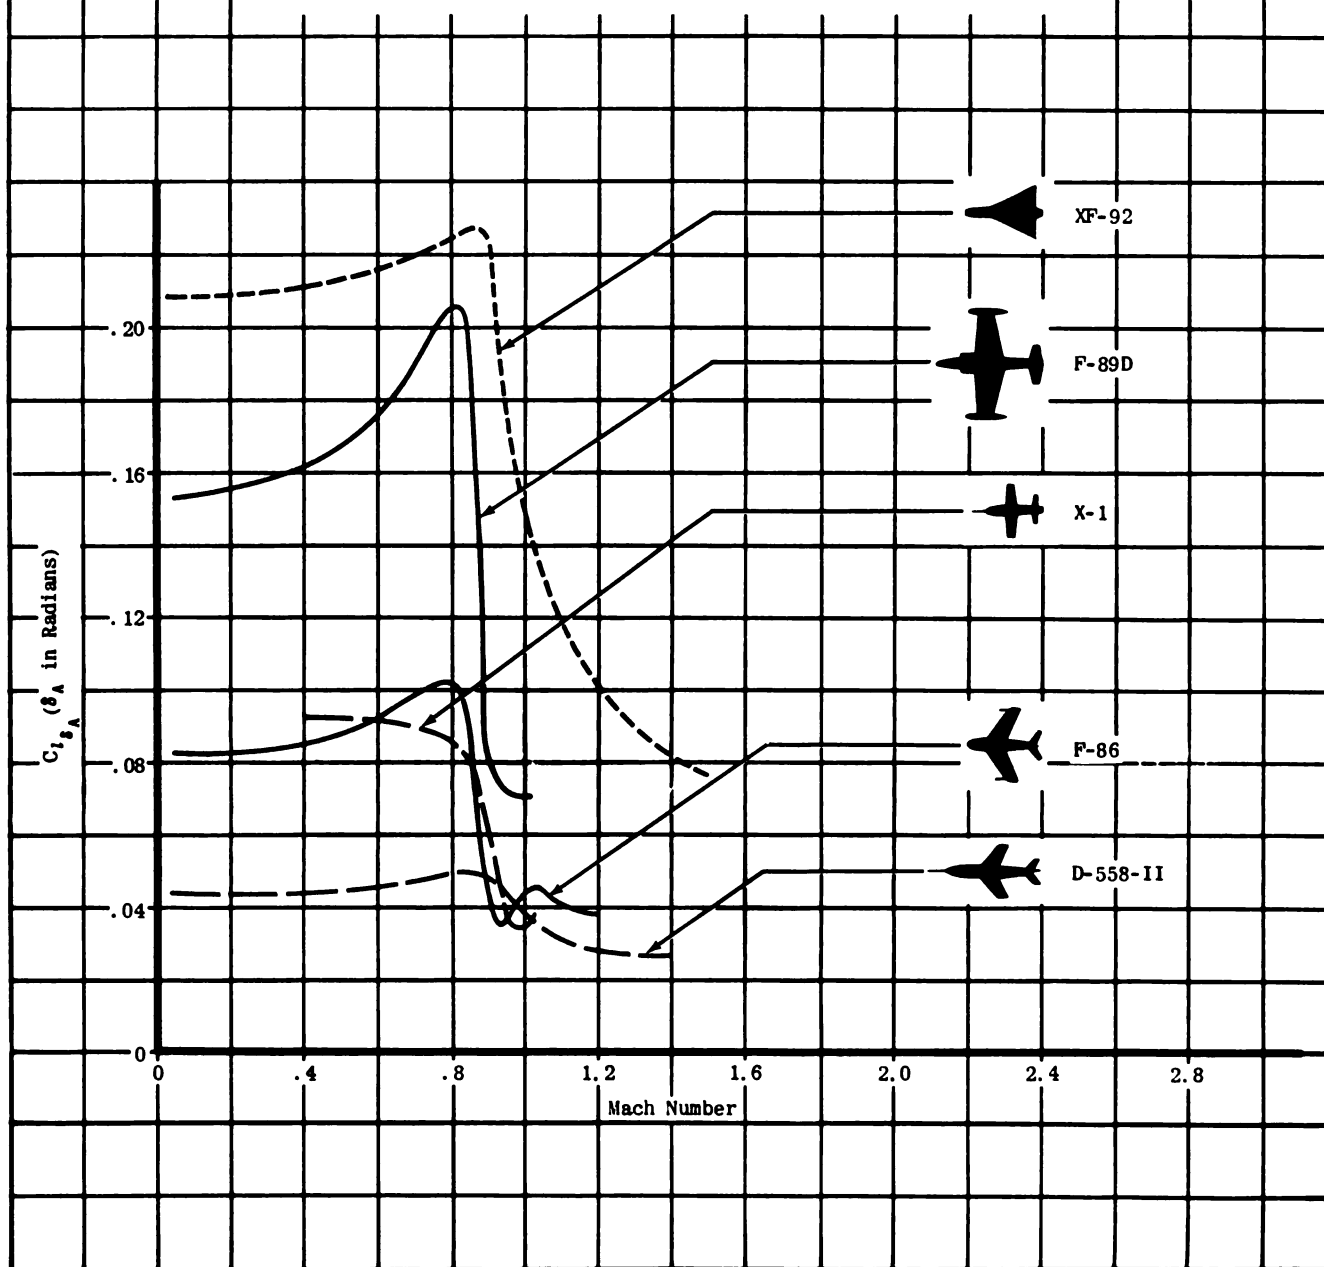


Figure A - 28 Variation of $C_{l_{\delta_A}}$ with Mach Number for Several High Speed Jet Aircraft

BUREAU OF AERONAUTICS
FLIGHT CONTROL AND FIRE CONTROL SYSTEM MANUALS

**VOL I - "METHODS OF ANALYSIS AND SYNTHESIS OF PILOTED AIRCRAFT
FLIGHT CONTROL SYSTEMS" AE-61-4 I (251 pages, 459 figures; \$4.00)**

Chapters - Fundamental Concepts, Analysis, Synthesis, Optimum Synthesis Methods, Non-linearities, Machine Methods, Analog Computer, Mathematical Background.

VOL II - "DYNAMICS OF THE AIRFRAME" AE-61-4 II (185 pages, 178 figures; \$4.25) Addendum to Vol II (27 figures; \$1.50)

Chapters - Derivation of the Airframe Transfer Functions, Discussion of Transfer Functions, Discussion of Stability Derivatives, Methods of Obtaining Stability Derivatives.

VOL III - "THE HUMAN PILOT" AE-61-4 III (157 pages, 55 figures; \$3.50)

Chapters - Fundamental Aspects - Sensing and Actuating Processes of a Human Pilot, Approximate Methods Predicting Responses of a Human Pilot.

VOL IV - "THE HYDRAULIC SYSTEM" AE-61-4 IV (224 pages, 63 figures; \$4.25)

Chapters - General Considerations, Analysis of the Generalized Hydraulic Servo Actuator, a Generalized Hydraulic Control System, The Fully Powered Hydraulic Control System, The Power Boost Hydraulic Control System, Special Considerations in Hydraulic Control System Design and Analysis, Component Design Factors, Influence of Servomechanisms on the Flutter of Servo-Controlled Aircraft, Methods of Analysis of Servo Flutter Interaction.

VOL V - "THE ARTIFICIAL FEEL SYSTEM" AE-61-4 V (152 pages, 103 figures; \$3.00)

Chapters - The Control Feel Problem, Design Procedure, Design Criteria.

VOL VI - "AUTOMATIC FLIGHT CONTROL SYSTEMS FOR PILOTED AIRCRAFT" AE-61-4 VI (339 pages, 138 figures; \$6.00)

Chapters - Automatic Flight Control Systems Past and Present, Components of Automatic Flight Control Systems, Design Methods, Systems Engineering and Other Design Considerations, Appendix.


VOL VII - "METHODS OF DESIGN AND EVALUATION OF INTERCEPTOR FIRE CONTROL SYSTEM" AE-61-4 VII (550 pages, 168 figures; \$7.50)

Chapters - The Tactical Environment, Design Objectives, Armament, The Radar, The Computer, Infrared Fire Control Systems, Analysis of the Fire Control System, Evaluation of Fire Control Radars, Techniques of Estimating Weapon System Effectiveness, Appendices.

The volumes listed above complete the series of Flight Control and Fire Control System Manuals presently available, and are identical in content to the original contract publications.

To order one or more of these volumes, contact: NORTHROP CORPORATION,
NORAIR DIVISION, 1001 East Broadway, Hawthorne, California, Attn. Dept. 3860

TL
678
N6
v.2
Addend.



Stanford University Libraries
Stanford, California

Return this book on or before date due.

DEC 29 1969
JUN 10 1970

